

USER MANUAL

HDMI 1.3 60M KVM Extender

Enjoy the vivid world

Introduction

The Extender uses single cat5e or cat6(recommended) cables instead of HDMI cable to transmit high definition signal up to 60 meters, cutting down the cost. The Extender is designed to supply for long distance transmission of high definition signal.




TX



RX

Features

- * Support 1080P/60Hz;
- * Support local loop-out ;
- * Support 60m long distance transmission :

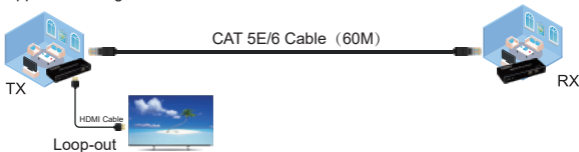

- * Low power consumption, low temperature and high safety ;
- * Both the TX and RX support 3.5MM left and right audio output ;
- * Support IR control ;
- * Support mouse and keyboard extension;


Specifications:

Length of CAT-6/CAT-5E cable between Rx and TX	Up to 60 meters
HDMI Input	1080p/1080i/720p/576p/576i/480p/480i
HDMI Output	1080p/1080i/720p/576p/576i/480p/480i
Max bandwidth	150MHz
Max baud rate	4.5Gbps
Input video signal	0.5~1.5Volts p-p
Output DDC signal	5Volts p-p (TTL)
Input HDMI cable distance	≤10m AWG26 HDMI standard cable
Output HDMI cable distance	≤15m AWG26 HDMI standard cable
TX Max working current	450mA
RX Max working current	350mA
Power adapter format	Input:AC (50HZ, 60HZ) 100V-240V; Output: DC5V/1A
Operating Temperature range	(-15 to +45 ℃)
Operating Humidity range	5 to 90%RH (No Condensation)
Dimension (L x W x H)	122x50x19 (mm)
TX Weight	108g
RX Weight	108g


Connecting and Operating:

- 1.Connect one HDMI cable between source device and TX Extender, the max cable distance is 10 meters;
- 2.Connect one HDMI cable between display device and RX Extender, the max cable distance is 15 meters;
- 3.Connect single cat-5e or cat-6(recommended) cables instead of HDMI cables between TX and RX Extender, the max cable distance is 60 meters;
- 4.Connect 5V power supply to the TX and RX;
- 5.LED indicator light:
TX LED indicator light: When there is signal input, it turns blue;
RX LED indicator light:When there is signal input, it turns blue;
- 6.EDID button: The button can support the switch of EDID between 720P and 1080P. (1080P is the default EDID when the power is on).

Connection diagram:

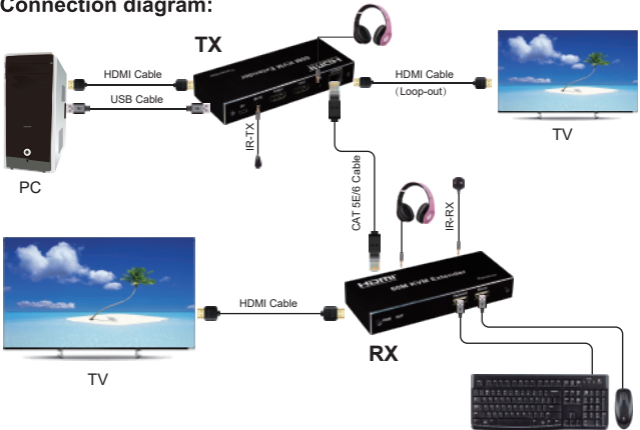


Physical interface diagram



- 1: 5V ---- 5V DC Power input port;
- 2: IR-TX ---- IR-TX port;
- 3: Output ---- HDMI Loop-out port;
- 4: Input ---- HDMI Input port;
- 5: L/R ---- Stereo output;

- 6: CAT5E/6 ---- Cat5e / 6 cable connection port;
- 7: PWR ---- Power indicator light;
- 8: IN ---- HDMI IN indicator light ;
- 9: OUT ---- HDMI OUT indicator light;
- 10: USB-PC ---- connect with the usb of device (PC);
- 11: EDID ---- 720P and 1080P switch button;



1: 5V ---- 5V DC Power input port;

2: IR-TX ---- IR-RX port;

3: Output ---- HDMI Out port;

4: L/R ---- Stereo output;

5: CAT5E/6 ---- Cat5e / 6 cable connection port;

6: PWR ---- Power indicator light;

7: OUT ---- HDMI OUT indicator light;

8: Keyboard ---- Keyboard port;

9: Mouse ---- Mouse port;

Application diagrams

HDMI extender is used in audio-visual conference, command and control center, ticketing platform, home theater, multi-media teaching, conference system and so on.



Audio-visual conference



Command and control center



Home theater

The Package includes:

1. TX Extender

1PC

2. RX Extender

1PC

3. IR cable

1 Pair

4. Power adapter

2PCS

5. User Manual

1PC