


REV.	REVISION DESCRIPTION	DATE
A0	FIRST EDT	2011/07/27

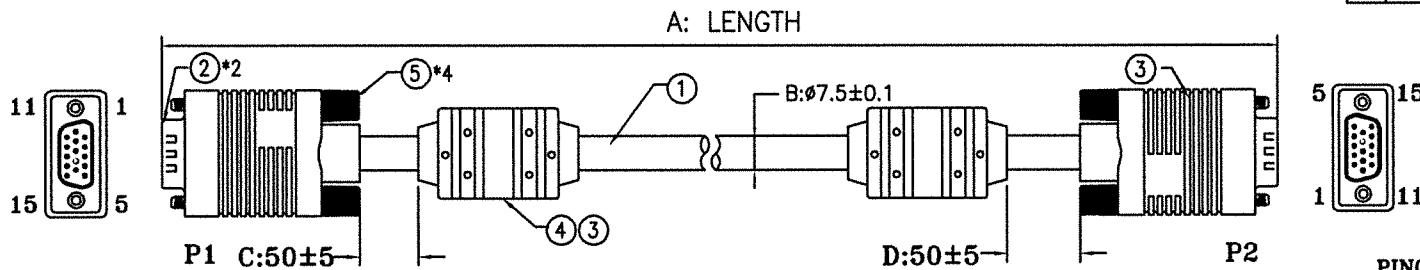


NOTE:


- 2M & 3M CABLE: 1PC / OPP BAG+LABEL
参照产品PN 号码张贴对应的贴纸
5M & 10M CABLE: 1PC / PE BAG+LABEL
参照产品PN 号码张贴对应的贴纸
- 产品符合“RoHS”规范。
- SHORT AND OPEN 100% TESTING
CONDUCTOR RESISTANCE 5 欧姆 (MAX)
INSULATION RESISTANCE 10M 欧姆 (MIN)
HI-POT: DC 250V

P/N 1094-020
2Mtr , SVGA Black
HD15M / HD15M
QTY:1PCS

5 055205 1836 4
MADE IN CHINA

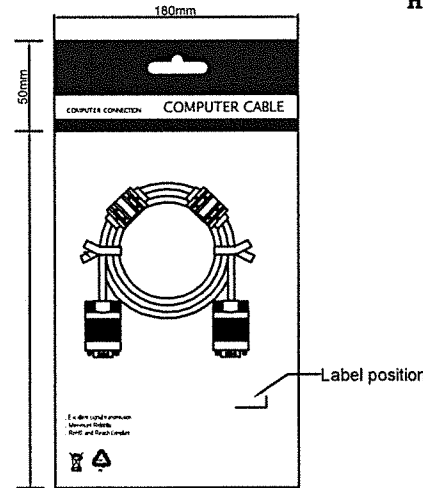

PINOUT:

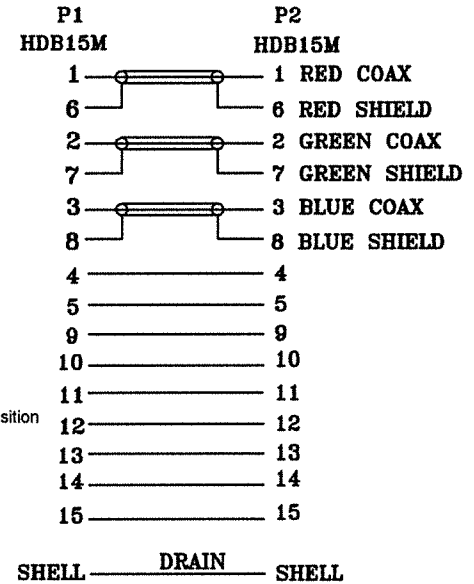

客户PN	HB PART NO.	长度	条码	袋子尺寸	袋子要求
1094-020	H210-2VMM-BK020	2M	5055205183640	18*24*0.05cm	OPP BAG
1094-030	H210-2VMM-BK030	3M	5055205183657	18*24*0.05cm	OPP BAG
1094-050	H210-2VMM-BK050	5M	5055205183664	//	PE BAG
1094-100	H210-2VMM-BK100	10M	5055205183671	//	PE BAG

5	SCREW	#4-40UNC SCREW E:40.2MM BLACK (RoHS)	4	PCS
4	CORE	FERRITE CORE :17.5*28.5*8.3MM (RoHS)	2	PCS
3	OUTER JACKET	OUTER JACKET PVC 45Pa Black (RoHS)	0.070	Kg
2	HDB15M	HDB15M BLUE TERMINAL PLATED GOLD FLASH (RoHS) 15PIN满针	2	PCS
1	CABLE	UL2919 28#(1C+S+MYLAR)*3+28#9C+A+B(96*0.12 AL/MG)+D SAWTOOTH JACKET OD:7.5MM BLACK XXXMM (RoHS)	1	PC

1094-XXX				
TOLERANCE		TITLE:		
.0	± 0.30	SVGA CABLE HD15M / HD15M Black		
.00	± 0.20	PART NO.:		DWG NO.:
.000	± 0.10	H210-2VMM-BKXXX		
ANGLE		SHEET:	SCALE:	UNIT:
.0	$\pm 2^\circ$	1 / 1	NONE	mm
PROJECTION		DRAWN:		CHECK:
				APPD: