



**Conn.1 USB3.0 A Type Male**

**Conn.2 USB3.0 A Type Male**

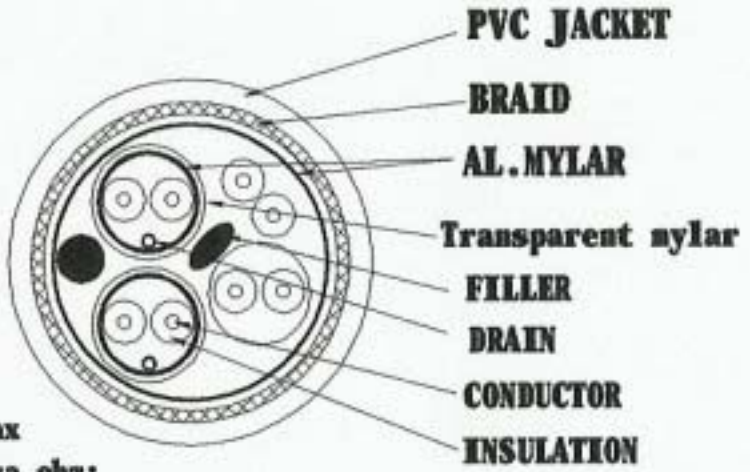

- Electrical Properties:**
1. Contact Resistance: 2 ohm max
  2. Insulation Resistance: 10 Mega ohm;
  3. HI-POT: 300V DC/10ms.
  4. All Materials With RoHS Standard

**Pin Assignment**

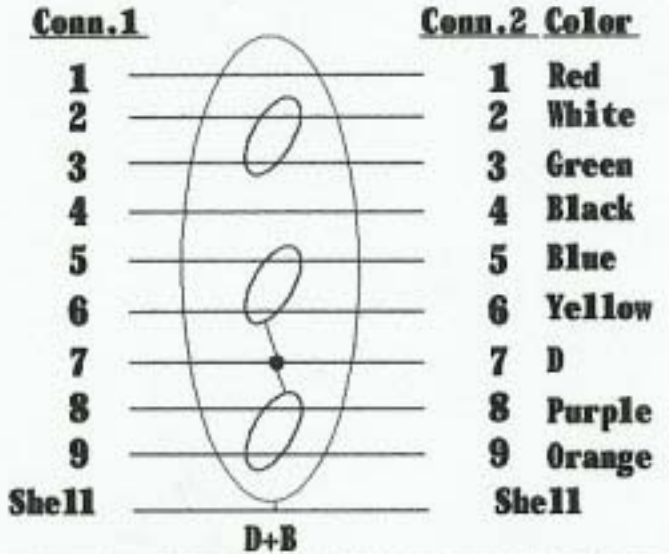

**Material List:**

NO.	NAME	DESCRIPTION	UNIT	Q'TY
1	CABLE	UL20276 USB3.0(1P*28#+D+AL+Mylar)*2C+28#+1P+28#+2C+AL +B OD:5.5 ± 0.15mm Jacket Color:BLUE	mm	1800
2	CONNECTOR	USB3.0 ("A") male Solder Type Insulation Color:BLUE Shell Gold Plated	set	2
3	OUTSIDE HOLDING	50P PVC COLOR :BLUE(301)	g	12

CUSTOMER: TECH			
DWG NO.: TH090227-02			
ITEM NO:		SCALE: NONE	DRAWN BY: <i>[Signature]</i>
		UNIT: MM	CHECKED BY: ' '
		REV: A	APPROVED BY:
PART NO: HK040404AB-1.8M			