
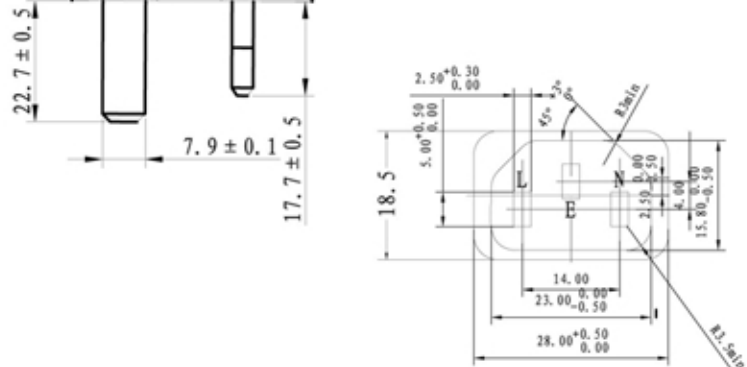


2200-xxx

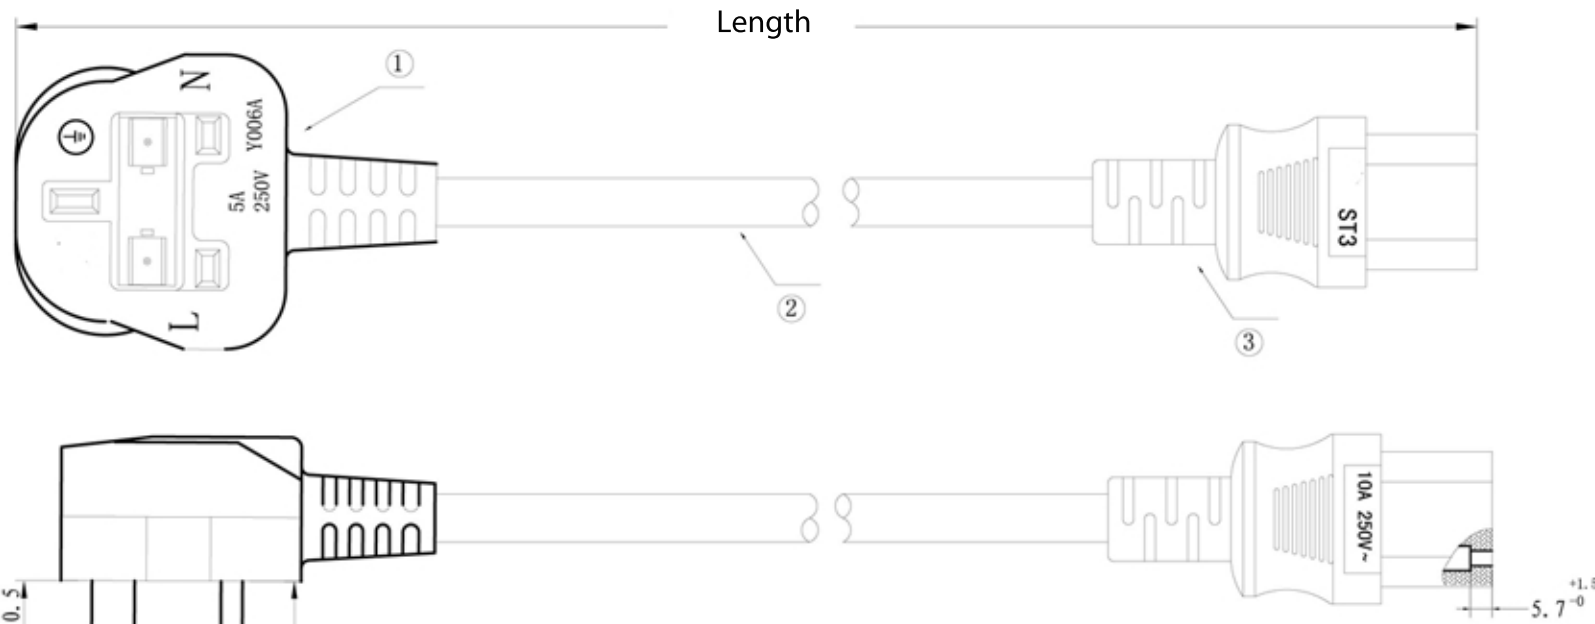

4	Tie wire	PVC L=100mm	1	Black
3	Connector	ST3	1	Black
2	Cable	H05VV-F 3G0.75mm ²	2M	Black
1	Plug	Y006A	1	Black
No	Item	Specification	QTY	Color

Notes:

1. Plug: Y006A 5A 250V~/ST3 10A 250V~ Clear Injection, no scratch and dirt
2. Cable: H05VV-F 3G0.75mm² Jacket $\phi 6.6 \pm 0.1$ Conductor 42×0.15 , Core $\phi 2.4 \pm 0.1$
Cable Mark: \triangleleft VDE \triangle H05VV-F 3G0.75mm² NINGBO YUXIN APPLIANCE CO;LTD.
3. Test: Hi-Pot: Inner Voltage AC2500V/1S, External Voltage AC6000V/1S, current leakage 1mA, insulation resistance no less than 50M Ω , no strike out;

P.N	Item	Drw.N	JT-YP-0113
Dre By		Date	2014.2.17
Check By	Tolerance	.x' ± 0.05 .xx' ± 0.15 .xxx' ± 0.25	比例 1:1 投影
			mm A