


2206-020

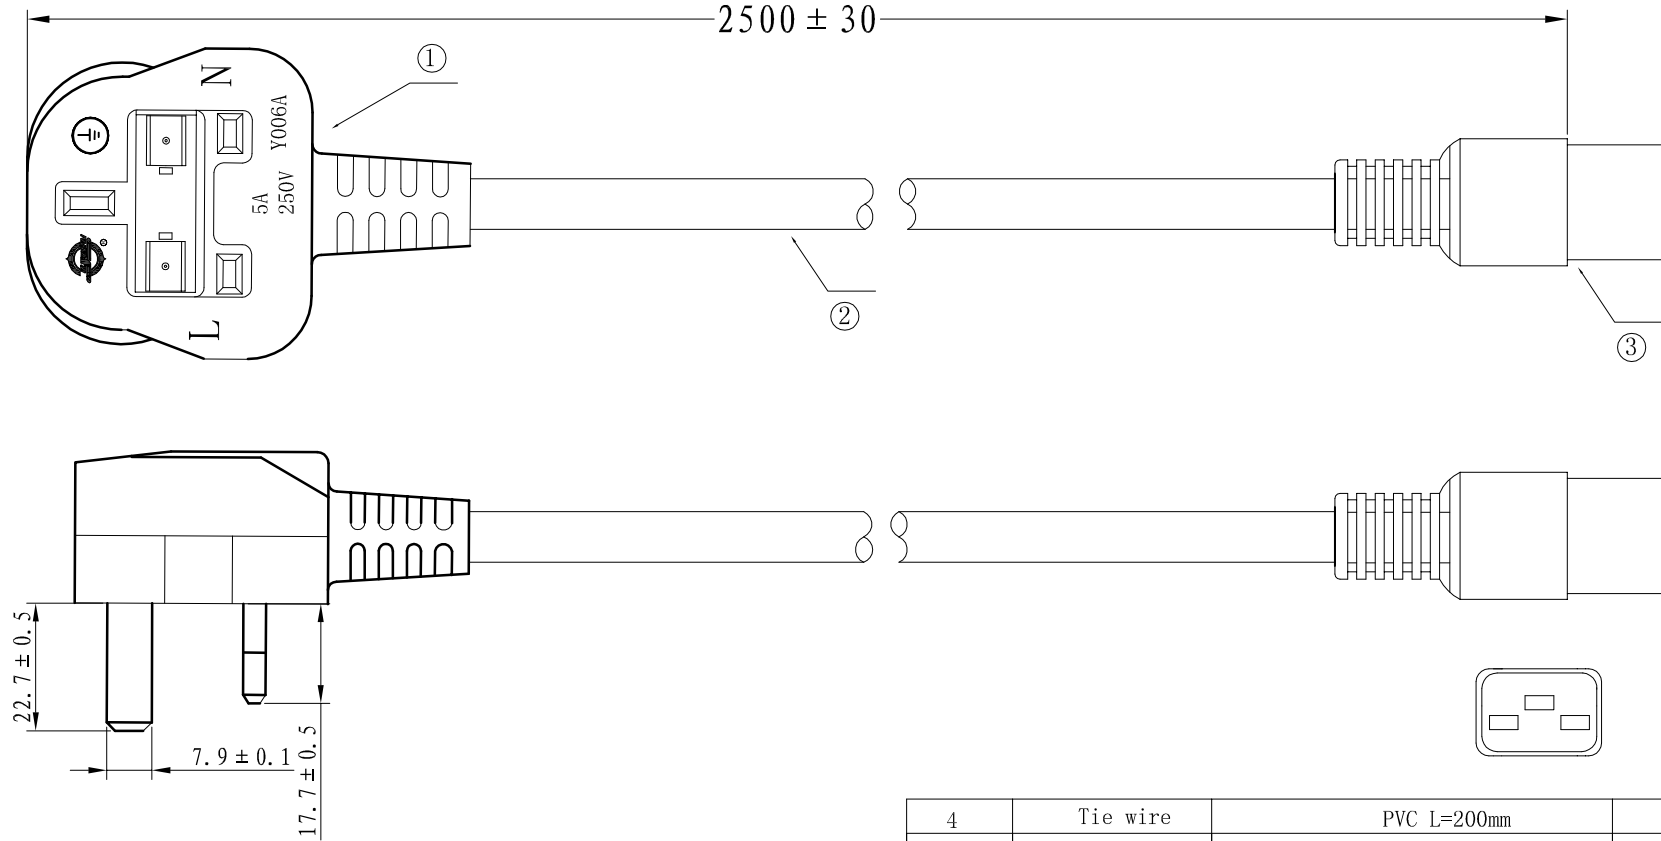

Notes:

1. Plug: Y006A 5A 250V~/C19 10A 250V~ Clear Injection, no scratch and dirt
2. Cable: H05VV-F 3G1.5mm<sup>2</sup> Jacket  $\varnothing 8.2 \pm 0.1$  Conductor  $48 \times 0.20$ , Core  $\varnothing 3.2 \pm 0.1$   
Cable Mark:  $\triangleleft$  VDE  $\triangle$  H05VV-F 3G1.5mm<sup>2</sup> NINGBO YUXIN APPLIANCE CO;LTD.
3. Test: Hi-Pot: Inner Voltage AC2500V/1S, External Voltage AC6000V/1S, current leakage 1mA, insulation resistance no less than 50M $\Omega$ , no strike out;

4	Tie wire	PVC L=200mm	1	Black
3	Connector	C19	1	Black
2	Cable	H05VV-F 3G1.5mm <sup>2</sup>	2.5M	Black
1	Plug	Y006A	1	Black
No	Item	Specification	QTY	Color



宁波云环电子集团有限公司  
NINGBO YUNHUAN ELECTRONICS GROUP CO.,LTD.

P. N		Item	Y006A/C19		Drw. N	JT-YP-0203
Dre By					Date	2014.8.14
Check By		Tolerance	.x'±0.05 .xx'±0.15 .xxx'±0.25	比例	1: 1	mm
				投影		A