


2208-020

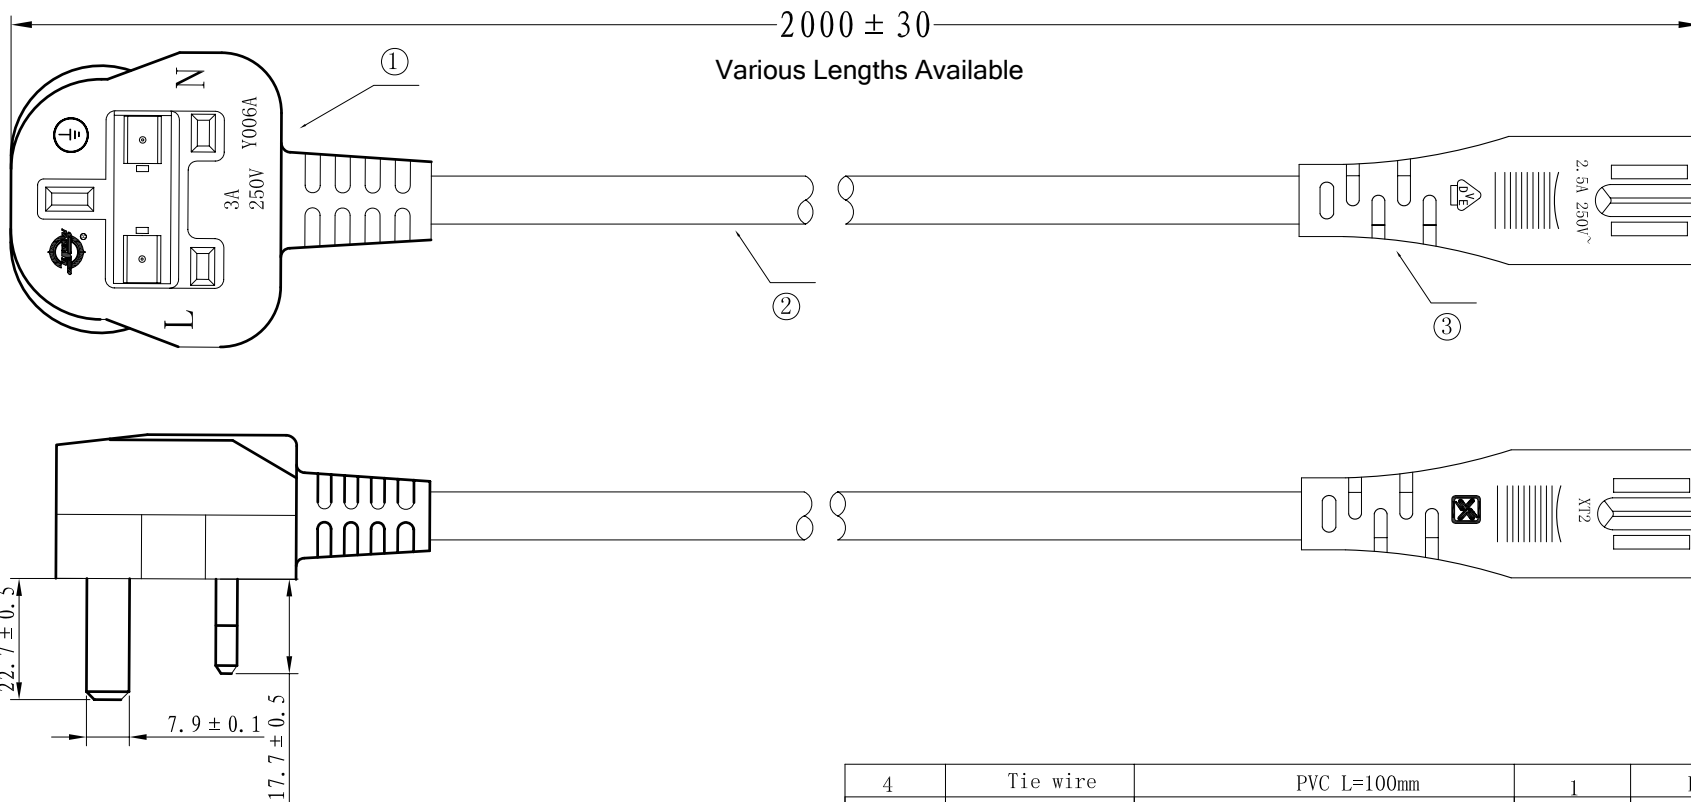

Notes:

1. Plug: Y006A 3A 250V~Clear Injection, no scratch and dirt
2. Cable: H03VVH2-F 2X0.75mm² Jacket \varnothing 3.5*5.6 \pm 0.1, Conductor 42×0.15 , Core \varnothing 2.2 \pm 0.1, Cable Mark: \triangleleft VDE \triangle H03VVH2-F 2X0.75mm² NINGBO YUXIN APPLIANCE CO.;LTD.
3. Test: Hi-Pot: Inner Voltage AC2500V/1S, External Voltage AC6000V/1S, current leakage 1mA, insulation resistance no less than 50M Ω , no strike out;

4	Tie wire	PVC L=100mm	1	Black
3	Connector	XT2	1	Black
2	Cable	H03VVH2-F 2X0.75mm ²	2M	Black
1	Plug	Y006A	1	Black
No	Item	Specification	QTY	Color



宁波云环电子集团有限公司
NINGBO YUNHUAN ELECTRONICS GROUP CO.,LTD.

P. N		Item	Y006A/XT2		Drw. N	JT-YP-0117
Dre By					Date	2014.2.17
Check By		Tolerance	.x' \pm 0.05 .xx' \pm 0.15 .xxx' \pm 0.25	比例	1: 1	mm
				投影		A