


2233-050

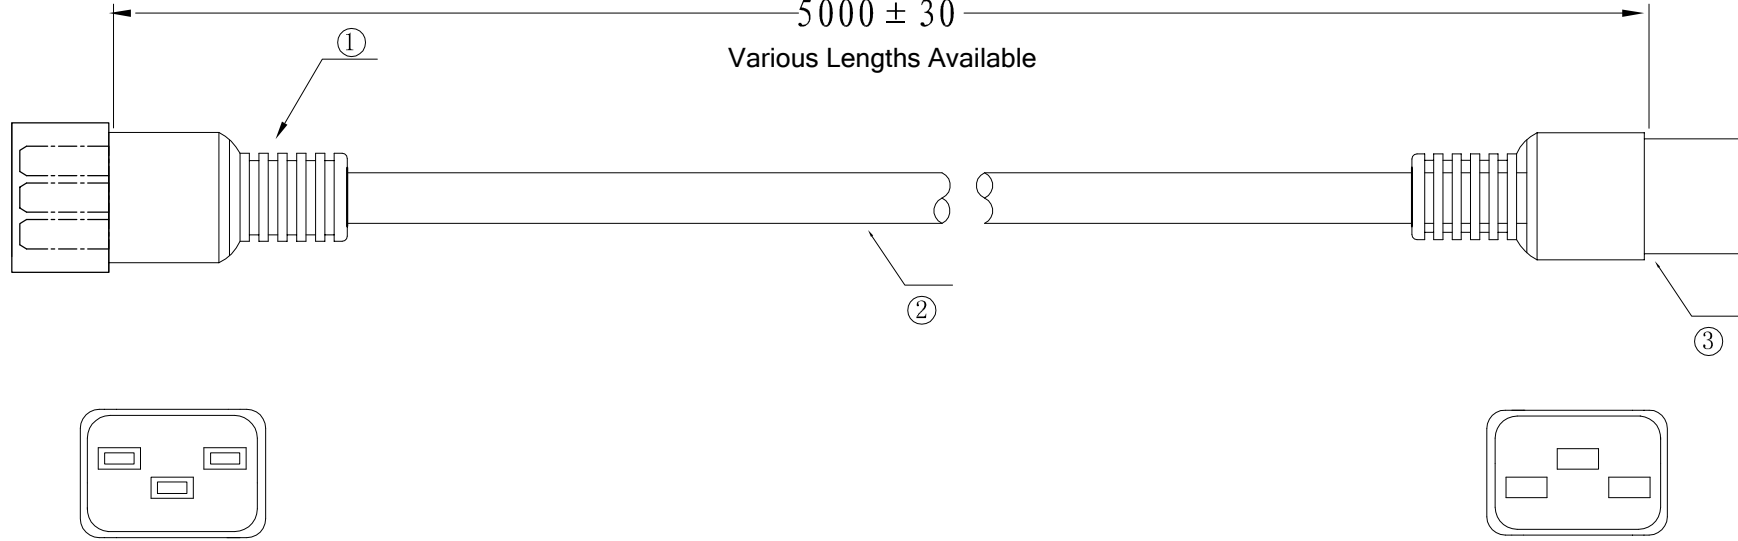

5000 ± 30  
Various Lengths Available

- Notes:
1. Plug: C20/C19 10A 250V~ Clear Injection, no scratch and dirt
  2. Cable: H05VV-F 3G1.5mm<sup>2</sup> Jacket  $\varnothing 8.2 \pm 0.1$  Conductor 48\*0.20, Core  $\varnothing 3.2 \pm 0.1$   
Cable Mark:  $\triangleleft$  VDE  $\triangle$  H05VV-F 3G1.5mm<sup>2</sup> NINGBO YUXIN APPLIANCE CO;LTD.
  3. Test: Hi-Pot: Inner Voltage AC2500V/1S, External Voltage AC4500V/1S, current leakage 1mA, insulation resistance no less than 50M $\Omega$ , no strike out;

4	Tie wire	PVC L=200mm	1	Black
3	Connector	C19	1	Black
2	Cable	H05VV-F 3G1.5mm <sup>2</sup>	5M	Black
1	Plug	C20	1	Black
No	Item	Specification	QTY	Color

 宁波云环电子集团有限公司  
NINGBO YUNHUAN ELECTRONICS GROUP CO.,LTD.

P. N		Item	C20/C19		Drw. N	JT-YP-0205
Dre By					Date	2014.8.14
Check By		Tolerance	.x*±0.05 .xx*±0.15 .xxx*±0.25	比例	1: 1	mm
				投影		A