


UTP CAT.5e SOLID INSTALLATION CABLE (305M) - External Grade Fca - Black

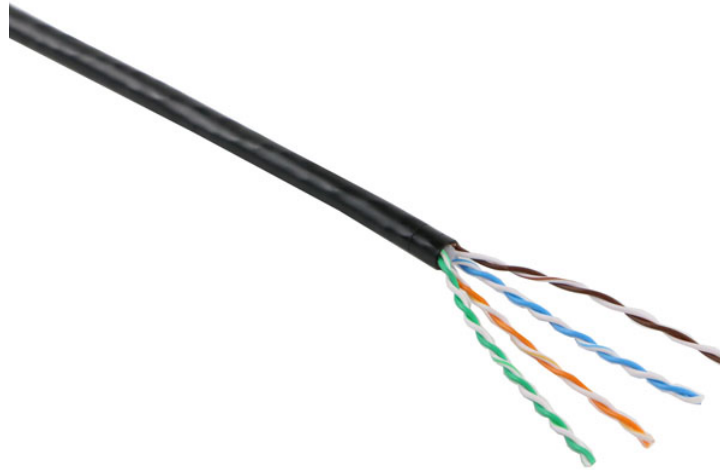

| | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------------------------------|---|-----------|----|--------------------|------|----------------------|------|----------------------|------|--------------------|--------------|----------------|-------------|------------------|----|---------------|----|------------------------------------|-----|------------------|-------------------------|-------------------|-------|------------------------|--------------|
| Product Code | 5002-350F | | | | | | | | | | | | | | | | | | | | | | | | |
| EAN | 5055205187471 | | | | | | | | | | | | | | | | | | | | | | | | |
| Product Title | UTP CAT.5e SOLID INSTALLATION CABLE (305M) - External Grade Fca - Black | | | | | | | | | | | | | | | | | | | | | | | | |
| Product Description | <p>Category 5e Unscreened External Grade Cables are manufactured and tested to the ISO 11801, EN 50173 and ANSI/TIA-568-C standards for enhanced performance Category 5 cables. Each cable consists of 8 colour coded polyethylene insulated conductors. These are twisted together to form 4 pairs with varying lay lengths. These pairs are jacketed in a heat and UV, moisture resistant black polyethylene outer sheath, making this cable ideal for outdoor installation.</p> | | | | | | | | | | | | | | | | | | | | | | | | |
| Product Specification | <table> <tr> <td>Category:</td> <td>5E</td> </tr> <tr> <td>Overall screening:</td> <td>None</td> </tr> <tr> <td>Conductor screening:</td> <td>None</td> </tr> <tr> <td>Outer Sheath Colour:</td> <td>Grey</td> </tr> <tr> <td>Core Gauge & Type:</td> <td>24 AWG Solid</td> </tr> <tr> <td>Core Material:</td> <td>Pure Copper</td> </tr> <tr> <td>Core Insulation:</td> <td>PE</td> </tr> <tr> <td>Outer Sheath:</td> <td>PE</td> </tr> <tr> <td>Reaction to Fire Class EN 13501-6:</td> <td>Fca</td> </tr> <tr> <td>Flame Retardant:</td> <td>EN 60332-1-2 & EN 50399</td> </tr> <tr> <td>Overall Diameter:</td> <td>5.2mm</td> </tr> <tr> <td>Operating Temperature:</td> <td>-10 to 75 °C</td> </tr> </table> | Category: | 5E | Overall screening: | None | Conductor screening: | None | Outer Sheath Colour: | Grey | Core Gauge & Type: | 24 AWG Solid | Core Material: | Pure Copper | Core Insulation: | PE | Outer Sheath: | PE | Reaction to Fire Class EN 13501-6: | Fca | Flame Retardant: | EN 60332-1-2 & EN 50399 | Overall Diameter: | 5.2mm | Operating Temperature: | -10 to 75 °C |
| Category: | 5E | | | | | | | | | | | | | | | | | | | | | | | | |
| Overall screening: | None | | | | | | | | | | | | | | | | | | | | | | | | |
| Conductor screening: | None | | | | | | | | | | | | | | | | | | | | | | | | |
| Outer Sheath Colour: | Grey | | | | | | | | | | | | | | | | | | | | | | | | |
| Core Gauge & Type: | 24 AWG Solid | | | | | | | | | | | | | | | | | | | | | | | | |
| Core Material: | Pure Copper | | | | | | | | | | | | | | | | | | | | | | | | |
| Core Insulation: | PE | | | | | | | | | | | | | | | | | | | | | | | | |
| Outer Sheath: | PE | | | | | | | | | | | | | | | | | | | | | | | | |
| Reaction to Fire Class EN 13501-6: | Fca | | | | | | | | | | | | | | | | | | | | | | | | |
| Flame Retardant: | EN 60332-1-2 & EN 50399 | | | | | | | | | | | | | | | | | | | | | | | | |
| Overall Diameter: | 5.2mm | | | | | | | | | | | | | | | | | | | | | | | | |
| Operating Temperature: | -10 to 75 °C | | | | | | | | | | | | | | | | | | | | | | | | |