


F-UTP CAT.5e SOLID INSTALLATION CABLE (305M) - External Grade Fca - Black

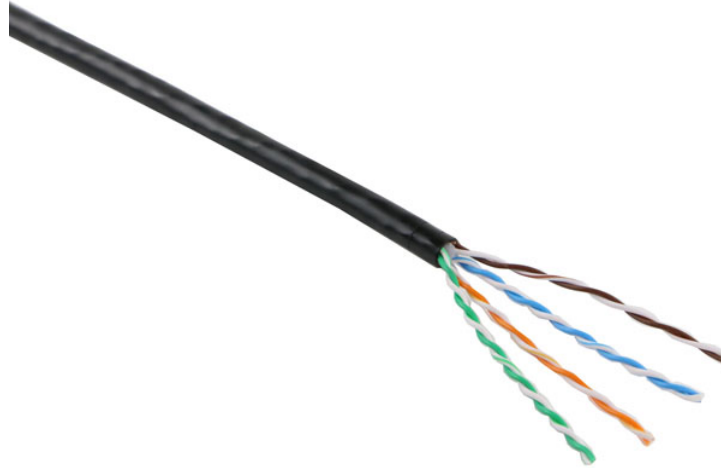

Product Code	5002-355F																								
EAN	5055309623882																								
Product Title	F-UTP CAT.5e SOLID INSTALLATION CABLE (305M) - External Grade Fca - Black																								
Product Description	<p>Category 5e Foil Screened External Grade Cables are manufactured and tested to the ISO 11801, EN 50173 and ANSI/TIA-568-C standards for enhanced performance Category 5 cables. Each cable consists of 8 colour coded polyethylene insulated conductors. These are twisted together to form 4 pairs with varying lay lengths. These pairs are jacketed in a heat and UV, moisture resistant black polyethylene outer sheath, making this cable ideal for outdoor installation.</p>																								
Product Specification	<table> <tr> <td>Category:</td> <td>5E</td> </tr> <tr> <td>Overall screening:</td> <td>Foil</td> </tr> <tr> <td>Conductor screening:</td> <td>None</td> </tr> <tr> <td>Outer Sheath Colour:</td> <td>Grey</td> </tr> <tr> <td>Core Gauge & Type:</td> <td>24 AWG Solid</td> </tr> <tr> <td>Core Material:</td> <td>Pure Copper</td> </tr> <tr> <td>Core Insulation:</td> <td>PE</td> </tr> <tr> <td>Outer Sheath:</td> <td>PE</td> </tr> <tr> <td>Reaction to Fire Class EN 13501-6:</td> <td>Fca</td> </tr> <tr> <td>Flame Retardant:</td> <td>EN 60332-1-2 & EN 50399</td> </tr> <tr> <td>Overall Diameter:</td> <td>5.2mm</td> </tr> <tr> <td>Operating Temperature:</td> <td>-10 to 75 °C</td> </tr> </table>	Category:	5E	Overall screening:	Foil	Conductor screening:	None	Outer Sheath Colour:	Grey	Core Gauge & Type:	24 AWG Solid	Core Material:	Pure Copper	Core Insulation:	PE	Outer Sheath:	PE	Reaction to Fire Class EN 13501-6:	Fca	Flame Retardant:	EN 60332-1-2 & EN 50399	Overall Diameter:	5.2mm	Operating Temperature:	-10 to 75 °C
Category:	5E																								
Overall screening:	Foil																								
Conductor screening:	None																								
Outer Sheath Colour:	Grey																								
Core Gauge & Type:	24 AWG Solid																								
Core Material:	Pure Copper																								
Core Insulation:	PE																								
Outer Sheath:	PE																								
Reaction to Fire Class EN 13501-6:	Fca																								
Flame Retardant:	EN 60332-1-2 & EN 50399																								
Overall Diameter:	5.2mm																								
Operating Temperature:	-10 to 75 °C																								