

Excel Category 6 Cable F/UTP Dca LS0H 305m Reel - Violet

Item Code: 5005-250E

excel
without compromise.



✕ EC Verified

✕ Choice of colour

✕ Choice of reel size

✕ Fast feed box

✕ Sequential metre markings

Product overview

Excel Category 6 Screened cables are manufactured and tested to the TIA/EIA 568-B.2-1, EN50173-1 and ISO/IEC 11801 Category 6 specifications. Each cable consists of 8 colour coded polyethylene insulated conductors. These are twisted together to form 4 pairs with varying lay lengths. These pairs are then formed around a central 'X' shaped polyethylene filler, which assists in maintaining and enhancing the cable's performance.

The print legend on the cable now includes information regarding the DOP number, Test and Classification of the cable for traceability.

Product specifications

Features	Values
Category	6
Overall screening	Foil
Conductor screening	None
Outer sheath colour	Violet
Reaction-to-fire class according to EN 13501-6	Dca
Smoke development class according to EN 13501-6	s2
Euro class flaming droplets/particles according to EN 13501-6	d2
Euro class acidity according to EN 13501-6	a2
AWG-size	23
Specification core insulation	PE
Core identification	Colour


Excel Category 6 Cable F/UTP Dca LS0H 305m Reel - Violet

Item Code: 5005-250E

excel
without compromise.

Outer sheath material	Copolymer
Flame retardant	In accordance with EN 60332-1-2 and EN 50399
Outer diameter approx.	7.2 mm
Installation Temperature Range	0...50 °C
Operating Temperature Range	-10...60 °C
NVP value	72 %
Conductor category	Class 1 = solid
Total number of cores	8
Stranding element	Pairs
Conductor surface	Bare

Cross-section diagram

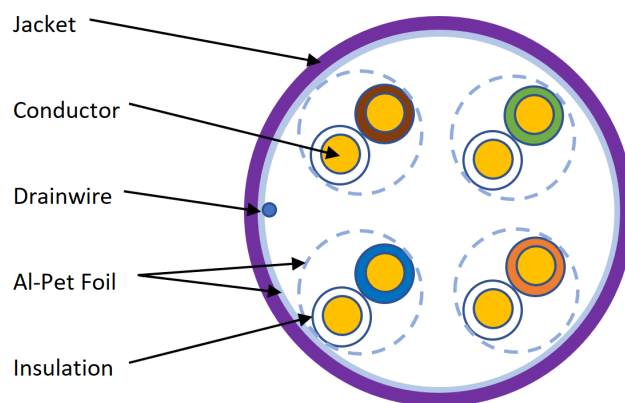

Cable specifications

Features	Values
Dielectric strength	1200 V dc or 850 V ac
Maximum Pulling Load	60N/6.1KgF
MBR during installation	8x cable OD
MBR installed	4x cable OD

Standards

Applicable standard	Subject
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
IEC 61156-5:2009+AMD1:2012 CSV	Multicore and symmetrical pair/quad cables for digital communications - Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz - Horizontal floor wiring - Sectional specification
EN 50173-1:2011	Information technology. Generic cabling systems - General requirements
EN 50173-2:2007 + A1:2010	Information technology. Generic cabling systems - Office premises
BS EN 50288-3-1:2013	Multi-element metallic cables used in analogue and digital communication and control Sectional specification for unshielded cables characterised up to 100 MHz. Horizontal and building backbone cables
EN 50399:2011+A1:2016	Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results
IEC 60332-1-2:2004	Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame
ANSI/TIA 568-2.D	Balanced Twisted-Pair Telecommunications Cabling and Components Standards
IEC 60754-2:2011	Test on gases evolved during combustion of materials from cables - Part 2: Determination of acidity (by pH measurement) and conductivity
IEC 61034-2:2005+A1:2013	Measurement of smoke density of cables burning under defined conditions - Part 2: Test procedure and requirements
EN 50575:2014 + A1:2016	Power, control and communication cables — Cables for general applications in construction works subject to reaction to fire requirements
RoHS	Restriction of Hazardous Substances - Compliant

Excel Category 6 Cable F/UTP Dca LS0H 305m Reel - Violet

Item Code: 5005-250E



Part number table

Part Number	Description
100-076	Excel Category 6 Cable F/UTP Dca LS0H 305m Reel - Violet
100-076/LTGN-500	Excel Category 6 Cable F/UTP Dca LS0H 500m Reel - Light Green
100-076-305M-GN	Excel Category 6 Cable F/UTP Dca LS0H 305m Easyreel - Green
100-077/LTGN	Excel Category 6 Dual Cable F/UTP Dca LS0H 500m Reel - Light Green
190-076	Excel Category 6 Cable F/UTP B2ca LS0H 305m Reel - Violet
190-076/LTGN-500	Excel Category 6 Cable F/UTP B2ca LS0H 500m Reel - Light Green
190-076-305M-GN	Excel Category 6 Cable F/UTP B2ca LS0H 305m Easyreel Box - Green



Unit 10, 2M Trade Park
Beddow Way
Aylesford
Kent. ME20 7BT
Tel: 01622 716688
Email: sales@fairline.co.uk
Web: www.fairline.co.uk

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.



E&OE.