


DIGITUS Cat.6 U/UTP installation cable, 305 m, simplex, Dca

DK-1614-VH-305
EAN 4016032435785

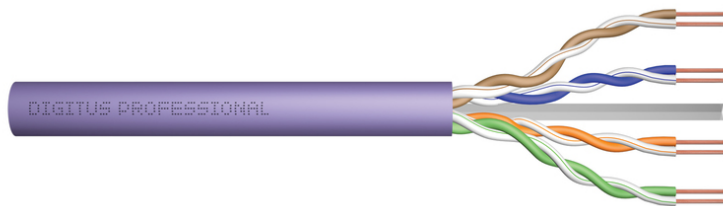

CAT 6 U-UTP installation cable, 250 MHz, AWG 23/1 Dca (LSZH-1), 305 m, paper box, simplex, purple

The Digitus® Professional Cat.6 U/UTP installation cable is characterized by the following cable construction 4x2x AWG23/1 and reaches a transmission frequency up to 250 MHz. The halogen free cable jacket is conform to the standard IEC 60332-1, FRNC-B, LSZH-1 and CPR Euro class Eca. The cable is suitable for building structured cabling in the secondary and tertiary area. Compliant with the following standards ISO/IEC 11801, DIN EN 50173, DIN EN 50288-6-1.

Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare annealed copper, solid AWG 23/1
- Insulation: HD-PE (High Density Polyethylene)
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Individual pair shield: None
- Overall shielding: None
- Outer sheath: Eca to B2ca acc. to EN 50575; LSZH
- Outer sheath diameter (nominal): 0,5 mm (Eca); 0,6 mm (Dca); 1,0 mm (Cca); 1,0 mm (B2ca)
- Outer sheath color: Purple (RAL 4005)
- Mechanical properties:
- Tensile loading: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Shipping- and storage temperature range: -20 °C up to +60 °C
- Operating temperature range: -20 °C up to +75 °C
- Installation temperature range: 0 °C up to +50 °C
- Overall diameter Simplex (nominal): 6,1 mm (Eca); 6,3 mm (Dca); 6,8 mm (Cca); 6,8 mm (B2ca)
- Weight (kg/km): 41 kg (Eca); 42 kg (Dca); 44 kg (Cca); 44 kg (B2ca)
- Electrical properties:

- Impedance: 100±50Ω @ 1 - 250MHz
- Capacitance: 40 pF/m nominal @ 800 Hz
- Capacitance unbalance (pair-ground): 1.5 pF/m max. @ 1 KHz
- Insulation resistance: 5 GΩm x km min.
- DC loop resistance: 147 Ωm/km max. (2% max. resistance unbalance)
- Voltage resistance: 72 Vdc max.
- Coupling attenuation: CA-Type 3
- Signal propagation delay: 535 nS/100 m max.
- Propagation delay: 20 nS/100 m max.
- Separating class: „b“ gem. EN 50174-2
- NVP: 69%
- Nominal cross section conductor: 0.26
- Core insulation: PE (polyethylene)
- Core identification: Colour
- Core identification: Colour
- Flame retardant: In accordance with EN 60332-1-2
- Stranding element: Pairs
- Colour outer sheath: Other
- Category: 6
- Conductor material: Cu, bare
- Screen over stranding element: None
- Screen over stranding: None
- Material outer sheath: Polyolefin
- Conductor category: Class 1 = solid
- Permitted cable outer temperature, in movement: -20 ... 60
- Permitted cable outer temperature, fixed: -20 ... 75
- AWG-size: 23
- Number of cores: 8
- Outer diameter approx.: 6.2
- Low smoke (acc. EN 61034-2): yes
- NVP value: 69
- Halogen free (acc. EN 60754-1/2): yes

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	1	12.30	45.00	44.50	25.00	50,062.50
Packaging Unit Inside	1	12.30	45.00	44.50	25.00	50,062.50
Packaging Unit Single	1	12.30	45.00	44.50	25.00	50,062.50
Net single without Packaging	1	11.36	45.00	44.50	25.00	50,062.50

More images:

