


UTP CAT.6 SOLID INSTALLATION CABLE (305M) - LSZH/Dca - VIOLET

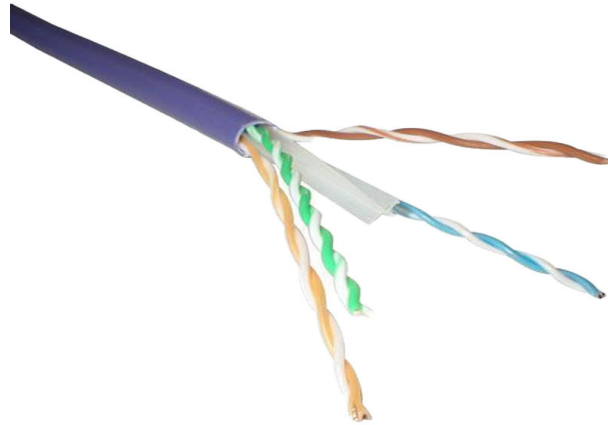

Product Code	5006-275F																						
EAN	5055309627392																						
Product Title	UTP CAT.6 SOLID INSTALLATION CABLE (305M) - LSZH/Dca - Violet																						
Product Description	<p>Category 6 Unscreened LS0H cables are manufactured and tested to the TIA/EIA 568-B.2-1, EN50173-1 and ISO/IEC 11801 Category 6 specifications. Each cable consists of 8 colour coded polyethylene insulated conductors. These are twisted together to form 4 pairs with varying lay lengths. These pairs are then formed around a central X-shaped polyethylene filler, which assists in maintaining and enhancing the cable performance.</p>																						
Product Specification	<table> <tr> <td>Category:</td> <td>6</td> </tr> <tr> <td>Overall screening:</td> <td>None</td> </tr> <tr> <td>Conductor screening:</td> <td>None</td> </tr> <tr> <td>Outer Sheath Colour:</td> <td>Violet</td> </tr> <tr> <td>Core Gauge & Type:</td> <td>23 AWG Solid</td> </tr> <tr> <td>Core Material:</td> <td>Pure Copper</td> </tr> <tr> <td>Core Insulation:</td> <td>PE</td> </tr> <tr> <td>Outer Sheath:</td> <td>LSZH</td> </tr> <tr> <td>Reaction to Fire Class EN 13501-6:</td> <td>Dca</td> </tr> <tr> <td>Overall Diameter:</td> <td>5.2mm</td> </tr> <tr> <td>Operating Temperature:</td> <td>-10 to 75 °C</td> </tr> </table>	Category:	6	Overall screening:	None	Conductor screening:	None	Outer Sheath Colour:	Violet	Core Gauge & Type:	23 AWG Solid	Core Material:	Pure Copper	Core Insulation:	PE	Outer Sheath:	LSZH	Reaction to Fire Class EN 13501-6:	Dca	Overall Diameter:	5.2mm	Operating Temperature:	-10 to 75 °C
Category:	6																						
Overall screening:	None																						
Conductor screening:	None																						
Outer Sheath Colour:	Violet																						
Core Gauge & Type:	23 AWG Solid																						
Core Material:	Pure Copper																						
Core Insulation:	PE																						
Outer Sheath:	LSZH																						
Reaction to Fire Class EN 13501-6:	Dca																						
Overall Diameter:	5.2mm																						
Operating Temperature:	-10 to 75 °C																						