

Patch Cable Adapter, CAT 5e, shielded



- ✓ Category 5e
- ✓ shielded
- ✓ 2x RJ45 socket to 1x RJ45 plug
- ✓ available with various pin assignments

Abstract

Patch cable adapter, CAT 5e, shielded, 2x RJ45 socket to 1x RJ45 plug, various pin assignments available

Features

- 2x RJ45 socket to 1x RJ45 plug
- Patch cable is equipped with molded kink protection boot with latch protection
- Cable length: 0.19 m
- available with various pin assignments

Technical Specifications

Housing	ABS, halogen free, UL94V0
Surface	Copper with nickel
PCB	FR4; 1.2 mm thickness
LSA contacts	Phosphor bronze with 50 μ tin plated over 60 μ nickel plated
Mating cycles	≥ 750
Operating temperature	-40 °C up to +80 °C


Product Overview

The shielded patch cable adapters consist of two RJ45 sockets and a 0.19 m long patch cord with RJ45 plug. They are available in different versions, which are individualized to the application area each by their different pin assignment. For example you can separate a line into CAT 5e line as well as ISDN line. The exact pin assignments and application areas, as well as technical drawings, you can find below.

Product Number Information


Item code	Pin assignment	Application area
DN-93904	1-1:2-2:3-3:4-1:5-2:6-6:7-3:8-6	2x CAT 5e (PC-PC)
DN-93904-B	1-1:2-2:3-3:4-4:5-5:6-6:7-3:8-6	CAT 5e/ISDN (PC-TEL)
DN-93904-C	1-3:2-6:3-3:4-4:5-5:6-6:7-4:8-5	2x ISDN (TEL-TEL)
AT-AG CX2	1:1	2x 1:1

Technical Drawings

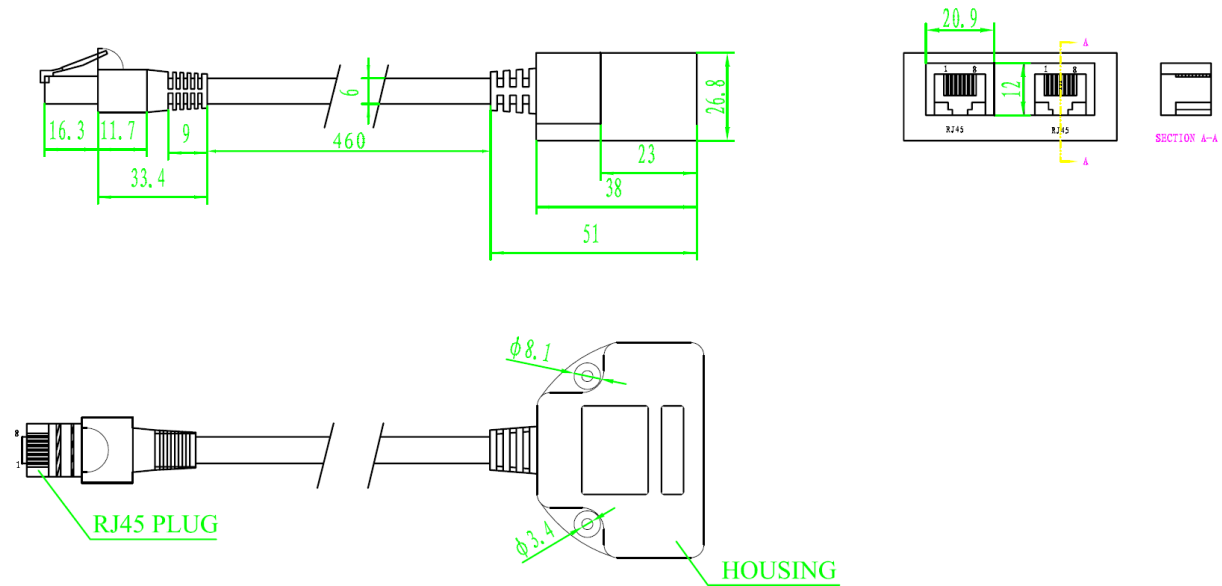


Pin Assignments


DN-93904

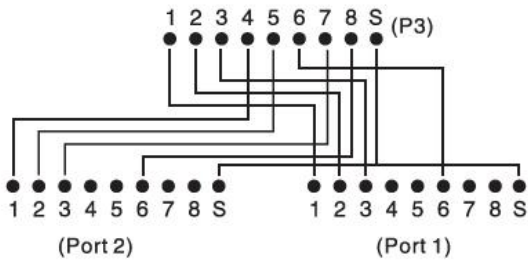

DN-93904-B

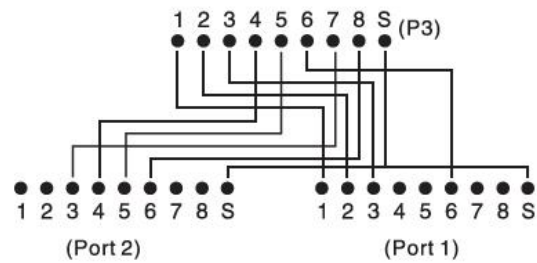

DN-93904-C

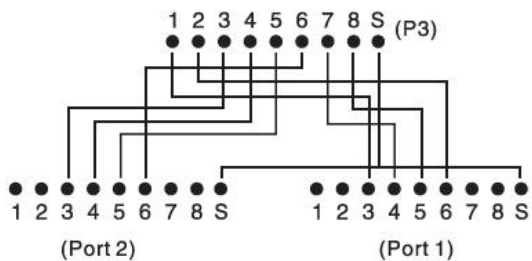

AT-AG CX2

