



UPDATE

DIGITUS®

USB TYPE-C™

ONE PLUG & MULTIPLE FUNCTIONS



USB Type-C™ Ein Stecker für alles!

Immer mehr Hersteller setzen auf USB Type-C™, statt auf die klassische USB- oder micro USB-Schnittstelle. Ob am Laptop, Smartphone oder Tablet - die Type-C™-Schnittstelle ermöglicht es, die Peripheriegeräte einfach und bequem anzuschließen, denn der Stecker ist wendbar. Vorbei sind die Zeiten, in denen sich der Nutzer auf Augenhöhe mit der USB-Schnittstelle begeben musste, um sicherzustellen, dass der Stecker richtig herum eingesteckt wird.

USB Type-C™ All-in-One Plug!

More and more manufacturers are relying on USB Type-C™ instead of the classical USB or micro USB interface. Whether on a laptop, smartphone, or tablet - the Type-C™ interface makes it possible to connect peripheral devices simply and conveniently, because the plug is reversible. Gone are the days when the user had to place him- or herself at eye level with the USB interface in order to make sure that the plug was being inserted in the correct orientation.



Vorteile

Langfristig ist damit zu rechnen, dass der Type-C™-Stecker den USB Typ A-Stecker ablösen wird, denn der neue Stecker bietet viele Vorteile:

1. Seine **kompakte Größe**. Er misst gerade einmal 8,4 x 2,6mm. Dies ermöglicht den Herstellern mehr Steckplätze unterzubringen oder sogar noch flachere Geräte zu entwickeln.
2. Außerdem bietet die Schnittstelle in Verbindung mit dem möglichen USB 3.1 Standard **höhere Datenübertragungsraten**. So lassen sich auch Bildsignale übertragen und ein Monitor anschließen.
3. Für eine **ausreichende Stromversorgung** können über USB Type-C™ bis zu 100W bzw. 5A zur Verfügung gestellt werden.

Advantages

In the long term, it is to be expected that the Type-C™ Plug will supersede the USB Type-A plug. Because the new Plug offers many advantages:

1. Its **compact size**. It measures a mere 8.4 x 2.6mm. This makes it possible for manufacturers to accommodate more slots or develop even slimmer devices.
2. Furthermore, the interface with the USB 3.1 standard offers **increased data transfer rates**. Thus, image signals can also be transmitted and monitors connected.
3. For an **adequate power supply**, up to 100W / 5A can be made available via the USB Type-C™.



Übertragungsrate

Bis zu 10 Gbit/s
20x schneller als USB 2.0
2x schneller als USB 3.0

Transfer rate

Up to 10 Gbit/s
20x faster than USB 2.0
2x faster than USB 3.0



Universell

Laptop, Tablet, Smartphone -
Verbinden Sie all Ihre Geräte
mit nur einem Kabel.

Universal

Laptop, tablet, smartphone -
connect all your devices
with just one cable.



Bildqualität

Ultra-HD-4K-Auflösung für
USB-C-fähige Bildschirme
4x höher als Standard HD

Image quality

Ultra-HD 4K resolution for
USB-C capable screens
4x higher than Standard HD



Power Delivery

Laden Sie Ihre Geräte
über den vorhandenen
Anschluss.

Power Delivery

Charge your devices via
the available connection.



Wendbarer Stecker

Einfach und bequem. Der
Anschluss funktioniert egal
wie rum.

Reversible plug

Simple and convenient.
The connection functions
regardless of orientation.

USB Type-C™ Kabel und Steckverbinder Spezifikation

Die aktuelle Herausforderung: Wer sich heute ein neues Smartphone, Tablet oder Notebook kauft, muss seine Peripheriegeräte über den herkömmlichen USB Typ A Anschluss verbinden. Dafür sind Kabel und Adapter notwendig. Wir bieten Ihnen Kabel und Adapter für alle gängigen Kombinationen in allen Preisklassen an.

USB Type-C™ Cable and Connector Specification

The current challenge: Whoever buys a new smartphone, tablet, or notebook nowadays, has to connect peripheral devices via the traditional USB Type-A connection. To do this, cables and adaptors are necessary. We offer you cables and adaptors for all established combinations in all price ranges.

3 - 1 USB Type-C™ Standard Kabel-Assemblierung

3 - 1 USB Type-C™ Standard Cable Assemblies

Cable Ref. Kabel Ref.	Plug 1 Stecker 1	Plug 2 Stecker 2	USB Version	Cable Length Kabellänge	Current Rating Strombelastbarkeit	USB Power Delivery (BMC) USB Stromversorgung	USB Type-C™ Electronically Marked
CC2 - 3	C	C	USB 2.0	< 4 m	3 A	Supported Wird unterstützt	Optional
CC2 - 5					5 A		Required Erforderlich
CC3G1 - 3	C	C	USB 3.1 Gen1	< 2 m	3 A	Supported Wird unterstützt	Required Erforderlich
CC3G1 - 5					5 A		Required Erforderlich
CC3G2 - 3	C	C	USB 3.1 Gen1	< 1 m	3 A	Supported Wird unterstützt	Required Erforderlich
CC3G2 - 5					5 A		Required Erforderlich

3 - 2 USB Type-C™ Kabel-Assemblierung älterer Steckverbinder

3 - 2 USB Type-C™ Legacy Cable Assemblies

Cable Ref. Kabel Ref.	Plug 1 Stecker 1	Plug 2 Stecker 2	USB Version USB Version	Cable Length Kabellänge	Current Rating Strombelastbarkeit
AC2 - 3	USB 2.0 Standard-A	USB 2.0 Type-C™	USB 2.0	< 4 m	3 A
AC3G2 - 3	USB 3.1 Standard-A	USB Full-Featured Type-C™	USB 3.1 Gen2	< 1 m	3 A
CB2 - 3	USB 2.0 Type-C ²	USB 2.0 Standard-B	USB 2.0	< 4 m	3 A
CB3G2 - 3	USB Full-Featured Type-C™	USB 3.1 Standard-B	USB 3.1 Gen2	< 1 m	3 A
CmB2	USB 2.0 Type-C™	USB 2.0 Mini-B	USB 2.0	< 4 m	500 mA
CµB2 - 3	USB 2.0 Type-C™	USB 2.0 Micro-B	USB 2.0	< 2 m	3 A
CµB3G2 - 3	USB Full-Featured Type-C™	USB 3.1 Micro-B	USB 3.1 Gen2	< 1 m	3 A

3 - 3 USB Type-C™ Adapter-Assemblierung älterer Steckverbinder

3 - 3 USB Type-C™ Legacy Adaptor Assemblies

Adaptor Ref. Adapter Ref.	Plug Stecker	Receptacle Buchse	USB Version USB Version	Cable Length Kabellänge	Current Rating Strombelastbarkeit
CµBR2 - 3	USB 2.0 Type-C™	USB 3.1 Micro-B	USB 2.0	< 0.15 m	3 A
CAR3G1 - 3	USB Full-Featured Type-C™	USB 3.1 Standard-A	USB 3.1 Gen1	< 0.15 m	3 A

2 - 1 USB Zusammenfassung der Stromversorgungsoptionen

2 - 1 USB Summary of power supply options

Mode of Operation Operationsmodus	Nominal Voltage Nominale Spannung	Maximum current Max. Strombelastbarkeit	Notes Anmerkungen
USB 2.0	5 V	See USB 2.0	
USB 3.1	5 V	See USB 3.1	
USB BC 1.2	5 V	Up to 1.5 A	Legacy charging Herkömmliche Ladekapazität
USB Type-C Current @ 1,5 A	5 V	1.5 A	Supports higher power devices Unterstützt Geräte mit höherem Stromverbrauch
USB Type-C Current @ 3,0 A	5 V	3 A	Supports higher power devices Unterstützt Geräte mit höherem Stromverbrauch
USB PD	Configurable up to 20 V Konfigurierbar bis zu 20 V	Configurable up to 5 A Konfigurierbar bis zu 5 A	Directional control and power level management Richtungskontrolle und Leistungsmanagement


Type-C™ to A
DB-300136-010-S

Type-C™ to Micro B
DB-300137-010-S

Type-C™ to Micro B
DB-300137-018-S

Type-C™ to C
DB-300139-010-S

Type-C™ to C
AK-300210-007-S

Type-C™ to A
AK-300315-001-S

Art. No.	EAN	Name	Length
AK-300146-010-S	4016032438298	USB Type-C™ connection cable, C to A, M/M, 1.0m, full featured, Gen2, 3A, 10GB, 3.1 Version, CE, bl	1,00 m
AK-300147-010-S	4016032438281	USB Type-C™ connection cable, C 90° angled to A, M/M, 1.0m, full featured, Gen2, 3A, 10GB, 3.1 Version, CE, bl	1,00 m
AK-300136-010-S	4016032368809	USB Type-C™ connection cable, C to A, M/M, 1.0m, Super Speed, 3.0 Version, bl	1,00 m
AK-300154-010-S	4016032455233	USB Type-C™ connection cable, C to A, M/M, 3A, 480MB, 2.0 Version, bl	1,00 m
AK-300154-018-S	4016032455240	USB Type-C™ connection cable, C to A, M/M, 3A, 480MB, 2.0 Version, bl	1,80 m
AK-300136-018-S	4016032368823	USB Type-C™ connection cable, C to A, M/M, 1.8m, High-Speed, 2.0 Version, bl	1,80 m
AK-300148-030-S	4016032437482	USB Type-C™ connection cable, C to A, M/M, 3.0m, 3A, 480MB, 2.0 Version, bl	3,00 m
AK-300148-040-S	4016032455257	USB Type-C™ connection cable, C to A, M/M, 3A, 480MB, 2.0 Version, bl	4,00 m
AK-300151-010-S	4016032437543	USB Type-C™ connection cable, C to micro B, M/M, 1.0m, full featured, Gen2, 3A, 10GB, 3.1 Version, CE, bl	1,00 m
AK-300137-010-S	4016032368816	USB Type-C™ connection cable, C to micro B, M/M, 1.0m, Super Speed, 3.0 Version, bl	1,00 m
AK-300137-018-S	4016032368830	USB Type-C™ connection cable, C to micro B, M/M, 1.8m, High-Speed, 2.0 Version, bl	1,80 m
AK-300137-030-S	4016032437550	USB Type-C™ connection cable, C to micro B, M/M, 3.0m, 3A, 480MB 2.0 Version, bl	3,00 m
AK-300139-010-S	4016032426011	USB Type-C™ connection cable, C to C, M/M, 1.0m, full featured, Gen2, 5A, 10GB, 3.1 Version, CE, bl	1,00 m
AK-300138-010-S	4016032368953	USB Type-C™ connection cable, C to C, M/M, 1.0m, High-Speed, 2.0 Version, bl	1,00 m
AK-300138-018-S	4016032368977	USB Type-C™ connection cable, C to C, M/M, 1.8m, High-Speed, 2.0 Version, bl	1,80 m
AK-300138-030-S	4016032455998	USB Type-C™ connection cable, C, M/M, 3A, 480MB, Version 2.0, bl	3,00 m
AK-300138-040-S	4016032455295	USB Type-C™ connection cable, C, M/M, 3A, 480MB, Version 2.0, bl	4,00 m
AK-300149-010-S	4016032437505	USB Type-C™ connection cable, C to B, M/M, 1.0m, full featured, Gen2, 3A, 10GB, 3.1 Version, CE, bl	1,00 m
AK-300149-018-S	4016032437529	USB Type-C™ connection cable, C to B, M/M, 1.8m, 3A, 3GB, 3.0 Version, bl	1,80 m
AK-300150-018-S	4016032437536	USB Type-C™ connection cable, C to B, M/M, 1.8m, 3A, 480MB 2.0 Version, bl	1,80 m
AK-300210-007-S	4016032451129	USB Type-C™ extensionn cable, C to C, M/F, 0.7m, full featured, Gen2, 5A, 10GB, 3.1 Version, CE, bl	0,70 m
AK-300315-001-S	4016032368847	USB Type-C™ adaptor cable, C to A, M/F, 0,15m, Super Speed, 3.0 Version, bl	0,15 m
AK-300316-001-S	4016032368793	USB Type-C™ adapter cable, C to micro B, M/F, 0,1m, 3A, 480MB, 2.0 Version, bl	0,15 m
AK-300155-010-S	4016032455288	USB Type-C™connection cable, C, M/M, 3A, 480MB, Version 2.0, bl	1,00 m
AK-300330-020-S	4016032451334	USB Type-C™ adapter cable, C to HDMI A, M/M, 4K/60Hz, 18GB	2,00 m
AK-300330-050-S	4016032451327	USB Type-C™ adapter cable, C to HDMI A, M/M, 4K/60Hz, 18GB	2,00 m
AK-300331-020-S	4016032451341	USB Type-C™ adapter cable, C to VGA, M/M, 1920x1200@60Hz	2,00 m
AK-300332-020-S	4016032451358	USB Type-C™ adapter cable, C to DVI, M/M, 1080p@60Hz	2,00 m
AK-300333-020-S	4016032451365	USB Type-C™ adapter cable, C to DP, M/M, 4K/60Hz, 32,4 GB	1,80 m
AK-300322-002-S	4016032455325	USB Type-C™ splitter cable, C - 3.5mm+type C, M/F/F, Gen2, 5A, 10GB, Version 3.1, CE, bl	0,20 m
AK-300401-002-S	4016032455332	USB Type-C™ splitter cable, C - 2x type C, M/F/F, Gen2, 5A, 10GB, Vers. 3.1, CE, bl	0,15 m
AK-300323-003-S	4016032455349	USB Type-C™ Slot Bracket cable, 10pinIDC -2xtype C, F/F/F, Gen2, 5A, 10GB, Vers. 3.1, CE, bl	0,25 m
AK-300506-000-S	4016032370802	USB Type-C™ adapter, C to A, M/F, 3A, 5GB, 3.0 Version, bl	----
AK-300523-000-S	4016032388524	USB Type-C™ adapter, C to micro B, M/F, 3A, 480MB, 2.0 Version, bl	----
DB-300331-020-S	4016032439943	USB Type-C™ adapter cable, C to VGA, M/M, 1920x1200@60Hz	2,00 m
DB-300136-010-S	4016032383772	USB Type-C™ connection cable, C to A, M/M, 1.0m, Super Speed, 3.0 Version, bl	1,00 m
DB-300136-018-S	4016032383789	USB Type-C™ connection cable, C to A, M/M, 1.8m, High-Speed, 2.0 Version, bl	1,80 m
DB-300137-010-S	4016032383796	USB Type-C™ connection cable, C to micro B, M/M, 1.0m, Super Speed, 3.0 Version, bl	1,00 m
DB-300137-018-S	4016032383802	USB Type-C™ connection cable, C to micro B M/M, 1.8m, High-Speed, 2.0 Version, bl	1,80 m
DB-300139-010-S	4016032426028	USB Type-C™ connection cable, C to C, M/M, 1.0m, Gen2, 5A, 3.1 Version, CE, bl	1,00 m
DB-300138-010-S	4016032383819	USB Type-C™ connection cable, C to C, M/M, 1.0m, High-Speed, 2.0 Version, bl	1,00 m
DB-300138-018-S	4016032383826	USB Type-C™ connection cable, C to C, M/M, 1.8m, High-Speed, 2.0 Version, bl	1,80 m
DB-300333-020-S	4016032439998	USB Type-C™ Video adapter cable, C to DP, M/M, 1.8m, 4K/60Hz, 32,4 GB, CE, bl, gold	2,00 m


USB 2.0

High speed USB
Up to 480 Mbps (theoretical speed)
Up to 35/40 MB/s (practical speed)

USB 3.0

SuperSpeed USB
Up to 5 Gbps (theoretical speed)
Up to 300 MB/s (practical speed)

USB 3.1 (Gen 1)

Formerly known as USB „3.0“
Up to 5 Gbps (theoretical speed)
Up to 300 MB/s (practical speed)

USB 3.1 (Gen 2)

Next generation SuperSpeed USB
Up to 10 Gbps (theoretical speed) or 1.2 GB/s

DIGITUS® Universal Docking Station, USB Type-C™

- Unterstützt Ultra HD (30Hz), 4096 x 2160p Auflösung (HDMI, DP)
- Dual Monitor Funktion - Anschluss von zwei Monitoren gleichzeitig
- Edles und hochwertiges Aluminium-Gehäuse


Technical Features

- Supports Ultra HD (30Hz), 3840 x 2160p resolution (HDMI, DP)
- Dual monitor function - connect two monitors at the same time (HDMI+DP or DP+VGA)
- 3x Video ports (HDMI, DisplayPort, VGA) - output of video signals with a max. resolution of UHD 4K2K, 30 Hz
- 4x USB 3.0 for Super Speed data transfer, 2 ports with charging function (BC 1.2) for mobile devices
- 1x USB-C port - Data / Power Delivery (PD) 2.0 (100W)
- 2x Stereo audio port - a port for headset, speakers, etc.

DIGITUS® Universal Docking Station, USB Type-C™

- Supports Ultra HD (30Hz), 4096 x 2160p resolution (HDMI, MiniDP)
- Dual monitor function - connect two monitors at the same time
- Premium and high-quality aluminum housing

- 1x Gigabit Ethernet port - connects your laptop to the network via cable
- 1x USB-C input (connection to laptop)
- Removable USB-C connection cable (100 cm) with 10G data transfer speed
- 1x Port for additional mains adaptor (optional): DC 20V/3.75A
- Premium and high-quality aluminum housing
- Dimensions: L 19.5 x W 8.5 x 2.2 cm
- Weight: 425 g
- Color: silver

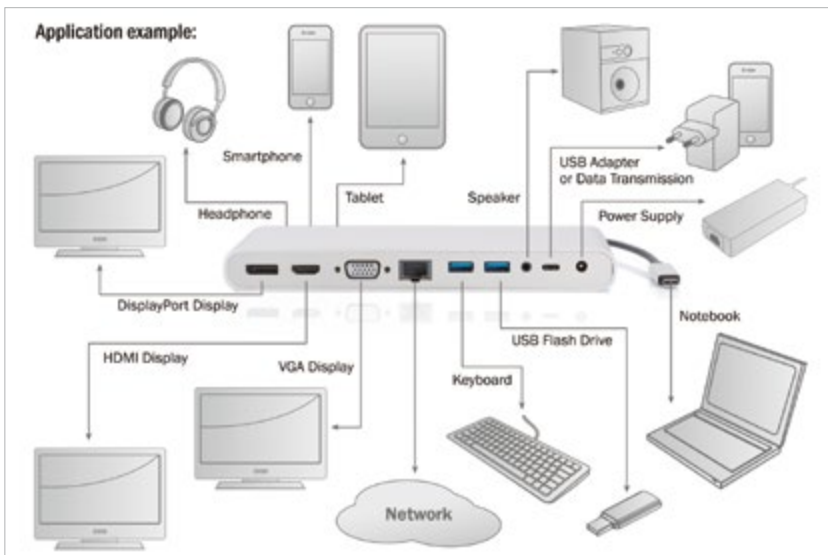

GEN 1
USB 3.1

Ultra HD
4K / 30 Hz

HDMI

DIGITUS® Universal Docking Station, USB Type-C™

DIGITUS® Universal Docking Station, USB Type-C™



- Unterstützt Ultra HD (30Hz), 4096 x 2160p Auflösung (HDMI, MiniDP)
- Dual Monitor Funktion - Anschluss von zwei Monitoren gleichzeitig
- Edles und hochwertiges Aluminium-Gehäuse

- Supports Ultra HD (30Hz), 4096 x 2160p resolution (HDMI, MiniDP)
- Dual monitor function - connect two monitors at the same time
- Premium and high-quality aluminum housing

Technical Features



- Supports Ultra HD (30Hz), 4096 x 2160p resolution (HDMI, MiniDP)
- 1x HDMI (UHD resolution, 4K2K, 30 Hz)
- 1 x mini display port (UHD resolution, 4K2K, 30 Hz)
- 1x VGA (Full HD)
- 3x USB 3.0 (SuperSpeed, 5 Gbps max.), one port with charging function for mobile devices (5V/1.5A)



GEN 1



DA-70861 EAN 4016032424970 | Universal Docking Station, USB Type-C™, silver

DA-70875 EAN 4016032456650 | Universal Docking Station, USB Type-C™, grey

DIGITUS® Universal Travel Docking Station, USB Type-C™

DIGITUS® Universal Travel Docking Station, USB Type-C™




- Unterstützt Ultra HD (30Hz), 3840 x 2160p Auflösung (HDMI)
- 2x Video Anschlüsse (HDMI, VGA)
- 2x USB 3.0 Port (Super-Speed) + Ladefunktion (BC 1.2) für Mobilgeräte (1x Port)

- Supports Ultra HD (30Hz), 3840 x 2160p resolution (HDMI)
- 2x Video connections (HDMI, VGA)
- 2x USB 3.0 port (super-speed) + charging function (BC 1.2) for mobile devices (1x port)

Technical Features



- Supports Ultra HD (30Hz), 3840 x 2160p resolution (HDMI) / 1x HDMI (UHD resolution, 4K2K, 30 Hz)
- 1x VGA (Full HD 1080p / 60 Hz)
- 2x USB 3.0 port for super-speed data transfer and one with charging function (BC 1.2) for mobile devices / 1x USB-C for data transfer (5 Gbit/s max.)
- 1x USB-C with Power Delivery (PD) 3.0 functionality (100W, 20V/5A)

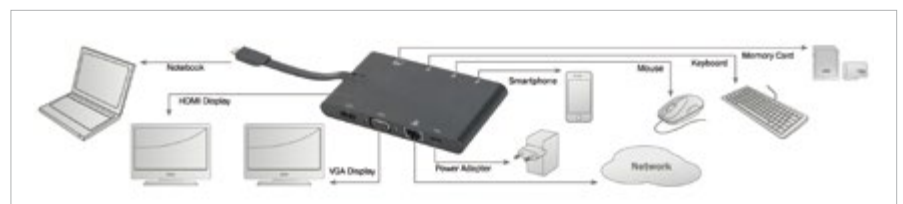

GEN 1



DA-70865 EAN 4016032441250 | Universal Travel Docking Station, USB Type-C™, black

DIGITUS® 12" Universal Notebook Docking Station USB Type-C™

- Passformgenau für 12" Notebooks
- Unterstützt Ultra HD (30Hz), 4096 x 2160p Auflösung (HDMI, MiniDP)
- Dual Monitor Funktion - Anschluss von zwei Monitoren gleichzeitig

Technical Features

- 3x video ports (HDMI, MiniDP, VGA) - video signal output with a max. resolution of UHD 4K2K, 30 Hz
- 3x USB 3.0 for data transfer in SuperSpeed, one port with charging function for mobile devices
- 1x USB-C port with power delivery (PD) function for fast charging of notebooks

DIGITUS® 12" Universal Notebook Docking Station, USB Type-C™

- A precise fit for 12" notebooks
- Supports Ultra HD (30Hz), 4096 x 2160p resolution (HDMI, MiniDP)
- Dual monitor function - connect two monitors at the same time

- 1x stereo audio port for headphones or microphones
- 1x Gigabit Ethernet port (network connection)
- 2x card readers
- Cable length: 10 cm



GEN 1
USB 3.1



DA-70862 EAN 4016032430094 | 12" Universal Notebook Docking Station, USB Type-C™, grey

DA-70860 EAN 4016032424987 | 12" Universal Notebook Docking Station, USB Type-C™ silver

DIGITUS® 14" Universal Notebook Docking Station, USB Type-C™

- 14 weitere Schnittstellen an Ihrem Notebook für u.a. Video-Signale, Daten, Power, Ethernet & Audio
- Unterstützt UHD bis 4K/30Hz bis 3840 x 2160p Auflösung
- 3x Videoschnittstellen (HDMI, DP, VGA) zum Anschluss von bis zu drei Monitoren zeitgleich

Technical Features

- Triple display support under Mac OS - SST (Single Stream Transport) - mirror the monitor
- Triple display support under Windows OS - SST (Single Stream Transport) and MST (Multi Stream Transport) - mirror and extend monitor
- Power Delivery: PD 3.0 up to max. 100 W (20V/5A)

DIGITUS® 14" Universal Notebook Docking Station, USB Type-C™

- 14 additional interfaces on your notebook for video signals, data, power, Ethernet and audio
- Supports UHD up to 4K/30Hz to 3840 x 2160p resolution
- 3x Video interfaces (HDMI, DP, VGA) to connect up to three monitors at the same time

- Theft protection (use of a notebook lock is possible)
- Supports DisplayPort alternate mode
- DisplayPort (DP) 1.2 support



GEN 1
USB 3.1



DA-70868 EAN 4016032456070 | 14" Universal Notebook Docking Station, USB Type-C™, black

DIGITUS® Universal Docking Station, USB Type-C™

- Unterstützt Ultra HD (30Hz), 4096 x 2160p Auflösung (HDMI, MiniDP)
- Dual Monitor Funktion - Anschluss von zwei Monitoren gleichzeitig
- Edles und hochwertiges Aluminium-Gehäuse

Technical Features

- 1x HDMI (UHD resolution, 4K2K, 30 Hz)
- 1 x Mini DisplayPort (UHD resolution, 4K2K, 30 Hz)
- 1x VGA (Full HD)
- for fast charging of notebooks (60W, 20V/3A)
- 1x Gigabit Ethernet port - connects your notebook to the network via cable

DIGITUS® Universal Docking Station, USB Type-C™

- Supports Ultra HD (30Hz), 4096 x 2160p resolution (HDMI, MiniDP)
- Dual monitor function - connect two monitors at the same time
- Premium and high-quality aluminum housing

- 3x USB 3.0 (SuperSpeed, 5 Gbps max.), one port with charging function for mobile devices (5V/1.5A)
- 1x stereo audio port - connects headphones or microphones



GEN 1
USB 3.1



DA-70863 EAN 4016032435396 | Universal Docking Station, USB Type-C™, silver

DA-70876 EAN 4016032456667 | Universal Docking Station, USB Type-C™, grey

DIGITUS® USB Type-C™ Multiport Travel Dock, 8-Port

- 2x Video-Anschlüsse (HDMI, VGA)
- 2x USB 3.0 Ports zur High Speed Datenübertragung
- Unterstützt Ultra HD (30Hz)
- 1x USB Type-C™ Anschluss - Power Delivery 3.0
- 1x Gigabit Ethernet Anschluss


DIGITUS® USB Type-C™ Multiport Travel Dock, 8-Port

- 2x video connections (HDMI, VGA)
- 2x USB 3.0 ports for high speed data transfer
- Supports Ultra HD (30Hz)
- 1x USB Type-C™ port - Power Delivery 3.0
- 1x Gigabit Ethernet port

Technical Features

- 1x HDMI (UHD resolution, 4K/30 Hz)
- 1x VGA (Full HD 1080p / 60 Hz)
- 2x USB 3.0 ports for high speed data transfer, one with a charging function (BC 1.2) for mobile devices (5V/1.5A)
- Supports Ultra HD (30Hz), 3840 x 2160p resolution (HDMI)
- 1x USB Type-C™ port - Power Delivery (PD) 3.0 (100W, 20V/5A max.) + data transfer (5 Gbit/s max.)
- 1x Gigabit Ethernet port - connects your laptop to the network via cable
- 2x card readers (MicroSD / SDHC, SDXC, MMC)
- Storable USB-C connecting cable (10 cm) - the connecting cable can be stored in the casing

- Premium aluminum housing
- Ultra-compact size as well as low weight - perfect for travelling and out and about
- Color: Silver
- Dimensions: L 12.5 x W 6.1 x H 1.5 cm
- Not all USB-C ports support all features of the USB Type-C™ standard. Make sure your notebook's USB-C port supports DisplayPort Alternate Mode (DP-Alt Mod) and USB Power Delivery (PD)
- The video output capability depends on the graphic card of your notebook and the connected monitor. Certain graphics cards have limited MST support, while some monitors also limit the available resolution.

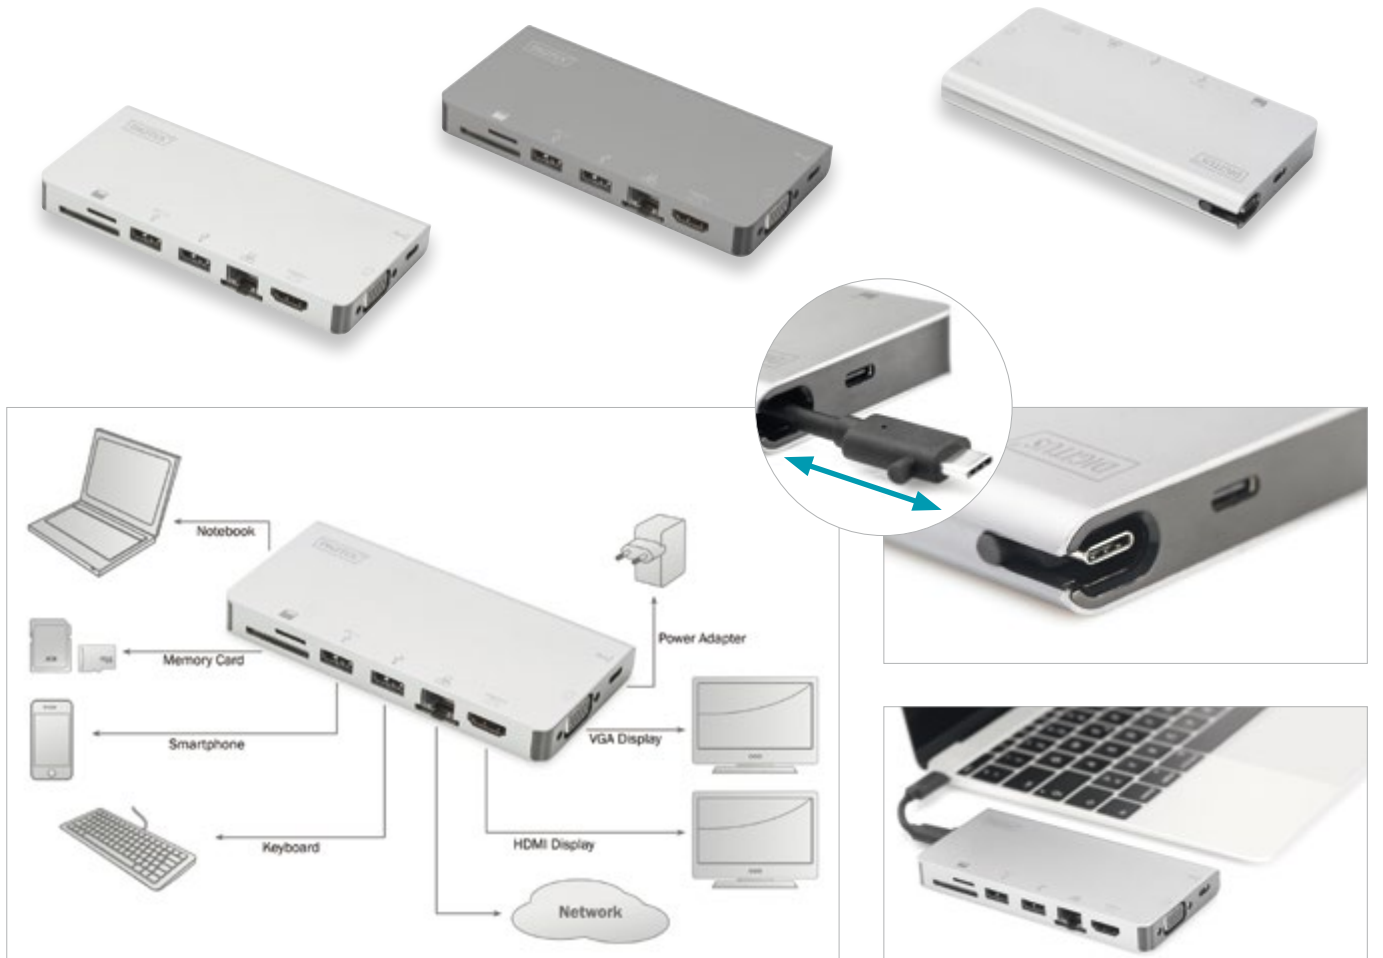

DIGITUS® USB Type-C™ Multiport Travel Dock, 6-Port

- 1x Video Anschluss / UHD 4K2K, 30 Hz (HDMI)
- 2x USB 3.0 Port (Super-Speed) einer mit Ladefunktion (BC 1.2) für Mobilgeräte (5V/1,5A)
- 2x Kartenleser (MicroSD / SDHC, SDXC, MMC)
- Verstaubares USB-C Anschlusskabel (10 cm)

Technical Features

- 1x HDMI (UHD resolution, 4K2K, 30 Hz)
- 2x USB 3.0 ports for high speed data transfer (5 Gbit/s max.), one with an extra charging function (BC 1.2) for mobile devices (5V/1.5A)
- Supports Ultra HD (30Hz), 3840 x 2160p resolution
- 1x USB Type-C™ port - Power Delivery (PD) 3.0 (100W, 20V/5A max.) + data transfer (5 Gbit/s max.)
- 2x card readers (microSD / SDHC, SDXC, MMC)
- Stowable USB-C connecting cable (10 cm) - the connecting cable can be stored in the casing
- Premium aluminum housing Ultra-compact size as well as low weight - perfect for travelling and out and about

DIGITUS® USB Type-C™ Multiport Travel Dock, 6-Port

- 1x video connection / UHD 4K2K, 30 Hz (HDMI)
- 2x USB 3.0 ports (High Speed) with a charging function (BC 1.2) for mobile devices (5V/1,5A)
- 2x card readers (microSD / SDHC, SDXC, MMC)
- Stowable USB-C connecting cable (10 cm)

- Color: Silver
- Dimensions: L 11.0 x B 6.1 x H 1.5 cm
- Not all USB-C ports support all the functions of USB Type-C™ standards. Make sure that the USB-C port of your laptop supports the DisplayPort Alternate Mode (DP alt modes) and USB Power Delivery (PD).
- The video output capability depends on the graphics card of your laptop and the connected monitor. Certain graphics cards have a limited MST support, while some screens also have restrictions of the available resolution.



GEN 1
USB 3.1



DA-70867 EAN 4016032450481 | USB Type-C™ Multiport Travel Dock, 6-Port

DIGITUS® USB Type-C™ Multiport Dock, 6-Port

- 1x Video Anschluss / UHD 4K2K, 30 Hz (HDMI)
- 2x USB 3.0 Port (Super-Speed) einer mit Ladefunktion (BC 1.2) für Mobilgeräte (5V/1,5A)
- 1x USB Type-C™ / PD 3.0 (100W, 20V/5A max.)
- 2x Kartenleser (MicroSD / SDHC, SDXC, MMC)

Technical Features

- 2x USB 3.0 ports for high speed data transfer (5 Gbit/s max.), one with an extra charging function (BC 1.2) for mobile devices (5V/1.5A)
- Supports Ultra HD (30Hz), 3840 x 2160p resolution
- 1x USB Type-C™ port - Power Delivery (PD) 3.0 (100W, 20V/5A max.) + data transfer (5 Gbit/s max.)
- 2x card readers (microSD / SDHC, SDXC, MMC)
- Premium aluminum housing
- Ultra-compact size as well as low weight - perfect for travelling and out and about
- Color: Silver
- Dimensions: L 9.5 x B 4.5 x H 1.15 cm

DIGITUS® USB Type-C™ Multiport Dock, 6-Port

- 1x video connection / UHD 4K2K, 30 Hz (HDMI)
- 2x USB 3.0 ports (High Speed) with a charging function (BC 1.2) for mobile devices (5V/1,5A)
- 1x USB Type-C / PD 3.0 (100W, 20V/5A max.)
- 2x card readers (microSD / SDHC, SDXC, MMC)


- Cable length: 10,0 cm
- Not all USB-C ports support all the functions of USB Type-C™ standards. Make sure that the USB-C port of your laptop supports the DisplayPort Alternate Mode (DP alt modes) and USB Power Delivery (PD).
- The video output capability depends on the graphics card of your laptop and the connected monitor. Certain graphics cards have a limited MST support, while some screens also have restrictions of the available resolution.



GEN 1
USB 3.1



DA-70874 EAN 4016032450931 | USB Type-C™ Multiport Dock, 6-Port

USB Type-C™ Docking Stations				
Part number	DA-70860 DA-70862	DA-70868	DA-70861 DA-70875	DA-70863 DA-70876
Product name	USB Type-C™ 12" Universal Docking Station	USB Type-C™ 14" Universal Docking Station	USB Type-C™ Universal Docking Station	
Number of connections	11	11	11	11
Dock type	On-Top Dock	On-Top Dock	Side Dock	Side Dock
HDMI port	✓	✓	✓	✓
VGA port	✓	✓	✓	✓
Mini DisplayPort port	✓	✗	✓	✓
DisplayPort port	✗	✓	✗	✗
USB 3.0 port	3x	3x	3x	3x
USB Type-C™ port (PD)	✓	✓	✓	✓
USB Type-C™ port (Data)	✗	✓	✗	✗
Audio jack (3.5 mm)	✓	✓	✓	✓
MicroSD card reader	✓	✓	✓	✓
SDHC, SDXC, MMC card reader	✓	✓	✓	✓
Gigabit Ethernet port	✓	✓	✓	✓
Power Delivery (PD)	2.0	3.0	2.0	2.0
Input power (max.)	60W (20V/3A)	100W (20V/5A)	60W (20V/3A)	60W (20V/3A)
UHD 4K / 30Hz	✓	✓	✓	✓
Charging function for mobile devices (BC 1.2)	✓	✓	✓	✓
Optional external power supply	✗	✗	✗	✗
Housing	Aluminum	ABS Plastic	Aluminum	Aluminum
Cable length	10,0 cm	10,0 cm	10,0 cm	10,0 cm
Color	Silver / Grey	Black	Silver / Grey	Silver / Grey

				
DA-70864	DA-70865	DA-70866 DA-70877	DA-70867	DA-70874
USB Type-C™ Universal Docking Station	USB Type-C™ Universal Travel Docking Station	USB Type-C™ Multiport Travel Dock, 8-port	USB Type-C™ Multiport Travel Dock, 6-port	USB Type-C™ Multiport Dock, 6-port
12	9	8	6	6
Side Dock	Side Dock	Side Dock	Side Dock	Side Dock
✓	✓	✓	✓	✓
✓	✓	✓	✗	✗
✗	✗	✗	✗	✗
✓	✗	✗	✗	✗
4x	2x	2x	2x	2x
✓	✓	✓	✓	✓
✓	✓	✓	✓	✓
2x	✗	✗	✗	✗
✗	✓	✓	✓	✓
✗	✓	✓	✓	✓
✓	✓	✓	✗	✗
2.0	2.0	3.0	3.0	3.0
100W (20V/5A)	100W (20V/5A)	100W (20V/5A)	100W (20V/5A)	100W (20V/5A)
✓	✓	✓	✓	✓
2x	2x	✓	✓	✓
✓	✗	✗	✗	✗
Aluminium	ABS Plastic	Aluminium	Aluminium	Aluminium
30,0 cm, detachable	10,0 cm, stowable	10,0 cm, stowable	10,0 cm, stowable	10,0 cm
Silver	Black	Silver / Grey	Silver	Silver

DIGITUS® USB Type-C™ HDMI Multiport Adapter, 4-Port

DIGITUS® USB Type-C™ HDMI Multiport Adaptor, 4-Port



- **Universeller USB Grafik Adapter mit HDMI Ausgang**
- **Inklusive zwei USB 3.0 Anschlüssen**
- **Ultra full HD Auflösung mit 3840x2160 Pixel bei 30HZ für optimalen Sehgenuss**
- **Ein Gigabit Ethernet Anschluss**
- **Betriebssysteme: Windows, Mac, Google Chrome**

- **Universal USB graphic adaptor with HDMI output**
- **Includes two USB 3.0 ports**
- **Ultra Full HD resolution (3840x2160) at 30 Hz for optimal viewing pleasure**
- **One Gigabit Ethernet Port**
- **Operating systems: Windows, Mac, Google Chrome**

Technical Features

- USB 3.0 multi-adaptor with Type-C™ port
- Ultra Full HD resolution (3840x2160) at 30 Hz for optimal viewing pleasure

- High-quality aluminium housing
- Chipset: RTL8153/VL813/PS176
- Cable length: 15 cm
- Size: 95 x 41 x 17 mm
- Weight: 45 g



DA-70847 EAN 4016032435112 | USB Type-C™ HDMI Multiport Adaptor, 4-Port

DIGITUS® USB Type-C™ HDMI Multiport Adapter, 3-Port

DIGITUS® USB Type-C™ HDMI Multiport Adaptor, 3-Port



- **Universeller USB Grafik Adapter mit HDMI Ausgang**
- **Inklusive 1 USB 3.0 Port**
- **1x HDMI (UHD Auflösung, 4K2K, 30 Hz)**

- **Universal USB graphic adaptor with HDMI output**
- **Includes one USB 3.0 port**
- **1x HDMI (UHD resolution, 4K2K, 30 Hz)**

Technical Features

- USB 3.0 multi-adaptor with Type-C™ port
- Ultra Full HD resolution (3840x2160) at 30 Hz for optimal viewing pleasure
- USB 3.0 port
- USB Type-C™ port with Power Delivery function

- High-quality aluminium housing
- Cable length: 20 cm
- Size: 51 x 58 x 11 mm
- Weight: 63 g
- Operating systems: Windows, Mac, Google Chrome



DA-70838-1 EAN 4016032440857 | USB Type-C™ HDMI Multiport Adaptor, 3-Port

DIGITUS® USB Type-C™ DP Multiport Adapter, 3-Port

DIGITUS® USB Type-C™ DP Multiport Adaptor, 3-Port



- **Universeller USB Grafik Adapter mit Displayport Ausgang**
- **Ultra full HD Auflösung mit 3840x2160 Pixel bei 30HZ für optimalen Sehgenuss**
- **Lade- und Datentransfer Funktion (USB Type-C™)**

- **Universal USB graphic adaptor with Displayport output**
- **Ultra Full HD resolution (3840x2160) at 30 Hz for optimal viewing pleasure**
- **PD and Datatransfer function via the Type-C™ port**

Technical Features

- USB 2.0 multi-adaptor with Type-C™ port
- Ultra Full HD resolution (3840x2160) at 30 Hz for optimal viewing pleasure
- USB 2.0 port
- High Quality aluminium housing

- Chipset: VL101 / FE1.1S
- Cable length: 20 cm
- Size: 51 x 80 x 14 mm
- Weight: 80g
- Operating systems: Windows, Mac, Google Chrome



DA-70846 EAN 4016032432289 | USB Type-C™ DisplayPort Multiport Adaptor, 3-Port

DIGITUS® USB Type-C™ VGA Multiport Adapter, 3-Port

- Universeller USB Grafik Adapter mit VGA Ausgang
- Inklusive 1 USB 3.0 Port
- Mit Ladefunktion über den Type - C™ Port
- Full HD Auflösung bei 75Hz
- Hochwertiges Aluminiumgehäuse
- Für alle Betriebssysteme; Windows, Mac und Google Chrome

Technical Features

- USB 3.0 multi-adapter with Type - C port
- Full HD resolution (1920x1080) at 75 Hz
- USB 3.0 port



DIGITUS® USB Type-C™ VGA Multiport Adaptor, 3-Port

- Universal USB graphic adaptor with VGA output
- Includes one USB 3.0 port
- With PD function via the Type - C™ port
- Full HD resolution at 75 Hz
- High-quality aluminium housing
- For all operating systems: Windows, Mac, and Google Chrome

- USB Type - C port with Power Delivery function
- Chipset: VL100/VL210/IT6513
- Cable length: 20 cm



GEN 2
USB 3.1



DA-70839 EAN 4016032385981 | USB Type-C™ VGA Multiport Adaptor, 3-Port

DIGITUS® USB Type-C™ 4K HDMI Grafik-Adapter

- Universeller USB Grafik Adapter mit HDMI Ausgang
- Mit integrierter Audioübertragung für Hörerlebnis in Dolby Surround
- Hochwertiges Aluminiumgehäuse
- Für alle Betriebssysteme; Windows, Mac und Google Chrome

Technical Features

- Universal USB graphic adaptor with HDMI output
- USB 3.0 adaptor with Type - C™ port
- Ultra Full HD resolution (3840x2160) at 30 Hz for optimal viewing pleasure



DIGITUS® USB Type-C™ 4K HDMI Grafik-Adaptor

- Universal USB graphic adaptor with HDMI output
- With integrated audio transmission for a superior Dolby Surround experience
- High-quality aluminium housing
- For all operating systems: Windows, Mac, and Google Chrome

- Chipset: VL100/PS176
- Full 4K resolution at 30 Hz
- Cable length: 20 cm



GEN 2
HDMI™ USB 3.1



DA-70836 EAN 4016032385950 | USB Type-C™ 4K HDMI Grafik-Adaptor

DIGITUS® USB Type-C™ VGA Grafik-Adapter



- **Universeller USB Grafik Adapter mit VGA Ausgang**
- **Hochwertiges Aluminiumgehäuse**
- **Für alle Betriebssysteme; Windows, Mac und Google Chrome**

Technical Features

- USB 3.0 adaptor with Type - C port
- Full HD resolution (1920x1080) at 75 Hz
- Full HD resolution at 75 Hz
- Chipset: CSL-C-001
- Cable length: 20 cm

DIGITUS® USB Type-C™ VGA Graphic Adaptor

- **Universal USB graphic adaptor with VGA output**
- **High-quality aluminium housing**
- **For all operating systems: Windows, Mac, and Google Chrome**



GEN 2
USB 3.1

DA-70837 EAN 4016032385967 | USB Type-C™ VGA Graphic Adaptor

DIGITUS® USB Type-C™ 4K DisplayPort Grafik-Adapter



- **Universeller USB Grafik Adapter mit Displayport Ausgang**
- **Volle 4K Auflösung bei 30Hz**
- **Mit integrierter Audioübertragung für Hörerlebnis in Dolby Surround**
- **Hochwertiges Aluminiumgehäuse**
- **Für alle Betriebssysteme; Windows, Mac und Google Chrome**

Technical Features

- USB 3.0 adaptor with Type - C port
- Ultra Full HD resolution (3840x2160) at 30 Hz

DIGITUS® USB Type-C™ 4K DisplayPort Graphic Adaptor

- **Universal USB graphic adaptor with Displayport output**
- **Full 4K resolution at 30 Hz**
- **With integrated audio transmission for a superior Dolby Surround experience**
- **High Quality aluminium housing**
- **For all operating systems: Windows, Mac, and Google Chrome**

- for optimal viewing pleasure
- Cable length: 20 cm



GEN 2
USB 3.1

DA-70844 EAN 4016032427780 | USB Type-C™ 4K DisplayPort Graphic Adaptor

DIGITUS® USB Type-C™ Gigabit Ethernet Adapter



- **USB 3.0 Typ-C™ Gigabit Ethernet Adapter**
- **Dank der USB 3.0 Schnittstelle können Sie im Gegensatz zu USB 2.0 die volle Geschwindigkeit von bis zu 1000Mbit/s erreichen**
- **Hochwertiges Aluminiumgehäuse**
- **Für alle Betriebssysteme; Windows, Mac und Google Chrome**

Technical Features

- USB Type-C™ Gigabit Ethernet Adapter
- RJ 45 Gigabit Ethernet connector (10/100/1000 Mbps)
- High-quality aluminium housing
- Cable length: 20 cm

DIGITUS® USB Type-C™ Gigabit Ethernet Adaptor

- **USB 3.0 Type-C™ Gigabit Ethernet adaptor**
- **Unlike USB 2.0, USB 3.0 ports allows you to enjoy full 1000 Mbps data transfer speeds.**
- **High-quality aluminium housing**
- **For all operating systems: Windows, Mac, and Google Chrome**

- For all operating systems: Windows, Mac and Google Chrome
- Chipset: RTL8153
- Dimensions: 64 x 24 x 17 mm
- Weight: 21 g



USB 3.0

DN-3024 EAN 4016032386001 | USB Type-C™ Gigabit Ethernet Adaptor

DIGITUS® USB Type-C™ Gigabit Ethernet Adapter 2.5G

- Einfache Installation dank Plug & Play - Treiber auf virtuellem CD Laufwerk im Adapter mitgeliefert
- Kein Netzteil notwendig - Stromversorgung erfolgt über die USB Type-C™ Schnittstelle
- Kompakte Abmessungen, formschönes Design
- Mit Windows, macOS, Google Chrome und allen weiteren USB Type-C™ kompatiblen Systemen lauffähig.

Technical Features

- Supports USB Type-C™ ports
- Gigabit data transmission at up to 2.5 Gbps
- RJ 45 Ethernet connection with LED function display 10/100/1000 Mbps, 2.5 Gbps
- Plug & Play - driver installation directly from the device (virtual CD drive)
- Chipset: RTL8156
- Wake-On-LAN function, start your computer via this Ethernet adapter via remote access
- Full Duplex Data Flow Control (10M/100M/1G/2.5G) - Auto-Negotiation

DIGITUS® USB Type-C™ Gigabit Ethernet Adapter 2.5G

- Easy installation thanks to Plug & Play - driver on virtual CD drive included in the adapter
- No power supply necessary - power supply via the USB Type-C™ interface
- Compact dimensions, attractive design
- „Runs with Windows, macOS, Google Chrome and all other USB Type-C™ compatible systems.,“



- Supports patch and crossover cables, automatic detection and switching
- Operating temperature: 0°C to +45°C
- Operating humidity: 10% to 85% (non-condensing)
- Power supply via USB-C™ (4.75 ~ 5.25V)
- Standby Power consumption: <60 mA
- Power consumption during operation: <80 mA @ 10Mbps, <130 mA @ 100Mbps, <300mA @ 1000Mbps, <460 mA @ 2.5 Gbps
- Cable length: 15 cm
- Material: plastic housing

DN-3025 EAN 4016032456469 | USB Type-C™ Gigabit Ethernet Adapter 2.5G

DIGITUS® USB Type-C™ HDMI Multiport Adapter, 3-Port

- 1x HDMI (UHD, 4K/30Hz)
- 1x USB 3.0 (SuperSpeed 5 Gbit/s max.)
- - unterstützt BC 1.2 zum Laden von Mobilgeräten (5V/1,5A)
- 1x USB-C™ (PD 2.0, 60W max.)

Technical Features

- Connection 1: USB-C™ plug
- Connection 2: HDMI socket
- Connection 3: USB 3.0 socket
- Connection 4: USB-C™ socket
- Extend your USB-C™ device with three additional ports

DIGITUS® USB Type-C™ HDMI Multiport Adaptor, 3-Port

- 1x HDMI (UHD, 4K/30Hz)
- 1x USB 3.0 (SuperSpeed, max. 5 Gbps)
- - supports BC 1.2 for charging mobile devices (5V/1.5A)
- 1x USB-C™ (PD 2.0, max. 60W)

- (HDMI, USB 3.0 and USB-C™)
- Supports Ultra HD (4K/30Hz)
- USB-BC (USB Battery Charging) 1.2
- Chipset: AG6310, LDR6023SD
- Cable length: 15.0 cm



GEN 1

USB 3.1 HDMI

Ultra HD
4K / 30 Hz

DA-70855 EAN 4016032447498 | USB Type-C™ HDMI Multiport Adapter, 3-Port

DIGITUS® USB Type-C™ 4K HDMI Grafik-Adapter



- Erweitert Ihr USB Type-C™ Gerät um einen HDMI-Anschluss
- Unterstützt Ultra HD (4K/30Hz)
- USB-Version: USB 3.1 (Gen. 1)
- Entspricht dem VESA DisplayPort Alternate Mode
- Kabellänge: 15,0 cm

Technical Features

- Connection 1: USB-C™ plug
- Connection 2: HDMI socket
- Extends your USB-C™ device with an HDMI port
- Supports Ultra HD (4K/30Hz)
- USB-C™ version: USB 3.1 (Gen. 1)
- Corresponds to the VESA DisplayPort Alternate Mode
- Chipset: AG9310
- Cable length: 15.0 cm
- Color: Black

DIGITUS® USB Type-C™ 4K HDMI Graphic Adaptor

- Extends your USB Type-C™ device with an HDMI port
- Supports Ultra HD (4K/30Hz)
- USB version: USB 3.1 (Gen. 1)
- Corresponds to the VESA DisplayPort Alternate Mode
- Cable length: 15.0 cm

- Dimensions: L 15.5 x W 3.7 x H 1.7 cm
- Weight: 20 g
- Not all USB-C ports support all functions of USB Type-C™ standards. Make sure that the USB-C™ port of your laptop supports the DisplayPort Alternate Mode (DP Alt modes).
- The video output capability depends on the graphics card of your laptop and the connected monitor. Some screens also have a limited resolution.



DA-70852 EAN 4016032447528 | USB Type-C™ 4K HDMI Graphic Adaptor

DIGITUS® USB Type-C™ VGA Grafik-Adapter



- Erweitert Ihr USB-C™ Gerät um einen VGA-Anschluss
- Unterstützt Full HD (1920x1080p / 60Hz)
- USB-Version: USB 3.1 (Gen. 1)
- Entspricht dem VESA DisplayPort Alternate Mode
- Kabellänge: 15,0 cm

Technical Features

- Connection 1: USB-C™ plug
- Connection 2: VGA socket
- Extends your USB-C™ device with a VGA port
- Supports Full HD (1920x1080p / 60Hz)
- USB-C™ version: USB 3.1 (Gen. 1)
- Corresponds to the VESA DisplayPort Alternate Mode
- Chipset: AG9300
- Cable length: 15.0 cm
- Color: Black

DIGITUS® USB Type-C™ VGA Graphic Adaptor

- Extends your USB-C™ device with a VGA port
- Supports Full HD (1920x1080p / 60Hz)
- USB version: USB 3.1 (Gen. 1)
- Corresponds to the VESA DisplayPort Alternate Mode
- Cable length: 15.0 cm

- Dimensions: L 15.5 x W 3.7 x H 1.7 cm
- Weight: 23.5 g
- Not all USB-C ports support all functions of USB Type-C™ standards. Make sure that the USB-C™ port of your laptop supports the DisplayPort Alternate Mode (DP Alt modes).
- The video output capability depends on the graphics card of your laptop and the connected monitor. Some screens also have a limited resolution



DA-70853 EAN 4016032447511 | USB Type-C™ VGA Graphic Adaptor

DIGITUS® USB Type-C™ VGA Multiport Adaptor, 3-Port

- **Erweitert Ihr USB-C™ Gerät um drei weitere Anschlüsse**
- **1x VGA (Full HD)**
- **1x USB 3.0 (SuperSpeed 5 Gbit/s max.)**
- **1x USB-C™ (PD 2.0, 60W max.)**
- **USB-C™ Version: USB 3.1 (Gen 1)**
- **Entspricht dem VESA DisplayPort Alternate Mode**

Technical Features

- Connection 1: USB-C™ plug
- Connection 2: VGA socket
- Connection 3: USB 3.0 socket
- Connection 4: USB-C™ socket
- Extend your USB-C™ device with three additional ports (VGA, USB 3.0 and USB-C™)
- 1x VGA (Full HD)
- 1x USB 3.0 (SuperSpeed, max. 5 Gbps) - supports BC 1.2 for charging mobile devices (5V/1.5A)
- 1x USB-C™ (PD 2.0, max. 60W)
- Supports Full HD (1920x1080p / 60Hz)
- USB-C™ version: USB 3.1 (Gen. 1)
- USB-BC (USB Battery Charging) 1.2

DIGITUS® USB Type-C™ VGA Multiport Adaptor, 3-Port

- **Extends your USB-C™ device with three additional ports**
- **1x VGA (Full HD)**
- **1x USB 3.0 (SuperSpeed, max. 5 Gbps)**
- **1x USB-C™ (PD 2.0, max. 60W)**
- **USB-C™ version: USB 3.1 (Gen. 1)**
- **Corresponds to the VESA DisplayPort Alternate Mode**

- Corresponds to the VESA DisplayPort Alternate Mode
- Chipset: AG6320, LDR6023SD
- Cable length: 15.0 cm
- Color: Black
- Dimensions: L 20.0 x W 7.7 x H 1.7 cm
- Weight: 40 g
- Not all USB-C ports support all functions of USB Type-C™ standards. Make sure that the USB-C™ port of your laptop supports the DisplayPort Alternate Mode (DP Alt modes).
- The video output capability depends on the graphics card of your laptop and the connected monitor. Some screens also have a limited resolution.



GEN 1

USB 3.1

Full HD
1080p

DA-70854 EAN 4016032447504 | USB Type-C™ VGA Multiport Adaptor, 3-Port

DIGITUS® USB Type-C™ 4K HDMI Grafik-Adapter + USB-C

- **Erweitert Ihr USB Type-C™ Gerät um einen HDMI-Anschluss**
- **Unterstützt Ultra HD (4K/60Hz)**
- **Bietet einen USB-C™ Port mit Power Delivery (PD) 2.0 zum Aufladen des Mobilgeräts**
- **USB-Version: USB 3.1 (Gen. 1)**
- **Entspricht dem VESA DisplayPort Alternate Mode**
- **Kabellänge: 11,0 cm**

Technical Features

- Connection 1: USB-C™ plug
- Connection 2: HDMI socket
- Connection 3: USB-C™ socket
- Extends your USB-C™ device with an HDMI port
- Provides a USB-C™ port with Power Delivery (PD) 2.0 to charge your mobile device
- 1x HDMI (UHD, 4K/60Hz)
- 1x USB-C™ (PD 2.0, max. 60W)
- Supports Ultra HD (4K/60Hz)
- USB-C™ version: USB 3.1 (Gen. 1)
- Corresponds to the VESA DisplayPort Alternate Mode
- Chipset: VL100 / PS1716

DIGITUS® USB Type-C™ 4K HDMI Graphic Adaptor + USB-C™

- **Extends your USB Type-C™ device with an HDMI port**
- **Supports Ultra HD (4K/60Hz)**
- **Provides a USB-C™ port with Power Delivery (PD) 2.0 to charge your mobile device**
- **USB version: USB 3.1 (Gen. 1)**
- **Corresponds to the VESA DisplayPort Alternate Mode**
- **Cable length: 11.0 cm**

- Supports HDCP 2.2
- Cable length: 11.0 cm
- Color: Black
- Dimensions: L 18.0 x W 4.0 x H 1.2 cm
- Weight: 20 g
- Not all USB-C ports support all functions of USB Type-C™ standards. Make sure that the USB-C™ port of your laptop supports the DisplayPort Alternate Mode (DP Alt modes).
- The video output capability depends on the graphics card of your laptop and the connected monitor. Some screens also have a limited resolution.



HDMI™

GEN 1

USB 3.1

Ultra HD
4K / 60 Hz

DA-70856 EAN 4016032451495 | USB Type-C™ 4K HDMI Graphic Adaptor + USB-C™

DIGITUS® USB Type-C™ VGA Grafik-Adapter + USB-C™



- Erweitert Ihr USB Type-C™ Gerät um einen VGA-Anschluss
- Unterstützt Full HD (1920x1080p / 60Hz)
- Bietet einen USB-C™ Port mit Power Delivery (PD) 2.0 zum Aufladen des Mobilgeräts
- USB-Version: USB 3.1 (Gen. 1)
- Entspricht dem VESA DisplayPort Alternate Mode
- Kabellänge: 11,0 cm

Technical Features

- Chipset: VL100/PTN3355
- Connection 1: USB-C™ plug
- Connection 2: VGA socket
- Connection 3: USB-C™ socket
- Extends your USB-C™ device with a VGA port
- Provides a USB-C™ port with Power Delivery (PD) 2.0 to charge your mobile device
- 1x VGA (Full HD)
- 1x USB-C™ (PD 2.0, max. 60W)
- Supports Full HD (1920x1080p / 60Hz)
- USB-C™ version: USB 3.1 (Gen. 1)
- Corresponds to the VESA DisplayPort Alternate Mode

DIGITUS® USB Type-C™ VGA Graphics Adaptor + USB-C™

- Extends your USB Type-C™ device with a VGA port
- Supports Full HD (1920x1080p / 60Hz)
- Provides a USB-C™ port with Power Delivery (PD) 2.0 to charge your mobile device
- USB version: USB 3.1 (Gen. 1)
- Corresponds to the VESA DisplayPort Alternate Mode
- Cable length: 11.0 cm

- Cable length: 11.0 cm
- Color: Black
- Dimensions: L 18.0 x W 4.0 x H 1.5 cm
- Weight: 30 g
- Not all USB-C ports support all functions of USB Type-C™ standards. Make sure that the USB-C™ port of your laptop supports the DisplayPort Alternate Mode (DP Alt modes).
- The video output capability depends on the graphics card of your laptop and the connected monitor. Some screens also have a limited resolution



GEN 1

USB 3.1


DA-70857 EAN 4016032451501 | USB Type-C™ VGA Graphic Adaptor + USB-C™

DIGITUS® USB Type-C™ HDMI + VGA Adapter



- Anschluss eines TVs, Monitors oder Projektors mit einem HDMI- bzw. VGA-Anschluss an Ihrem USB-C™ Gerät
- Erweitert Ihr USB-C™ Gerät um zwei Video-Schnittstellen (HDMI, VGA)
- Wiedergabe von einem Video-Signal, sofern zwei Monitore zeitgleich angeschlossen sind (Priorität: 1 HDMI, 2 VGA)
- Unterstützt Ultra HD (4K/30Hz) Auflösung (HDMI)
- USB-C™ Version: USB 3.1 (Gen 1)
- Entspricht dem VESA DisplayPort Alternate Mode


Technical Features

- Conn. 1: USB-C™ plug Conn. 2: HDMI socket
- Conn. 3: VGA socket
- Extend your USB-C™ device with two additional video ports (VGA, USB 3.0 or USB-C™)
- Video signal playback provided two monitors are connected at the same time (priority: 1 HDMI, 2 VGA)
- 1x HDMI (UHD, 4K/30Hz) / 1x VGA (Full HD)
- USB-C™ version: USB 3.1 (Gen. 1)
- Corresponds to the VESA DisplayPort Alternate Mode
- Chipset: VL100/IT6562FN

DIGITUS® USB Type-C™ HDMI + VGA Adaptor

- Connect a TV set, monitor or projector with an HDMI or VGA port to your USB-C™ device
- Extends your USB-C™ device with two video interfaces (HDMI and VGA)
- Video signal playback provided two monitors are connected at the same time (priority: 1 HDMI, 2 VGA)
- Supports Ultra HD (4K/30Hz) resolution (HDMI)
- USB-C™ version: USB 3.1 (Gen. 1)
- Corresponds to the VESA DisplayPort Alternate Mode

- Cable length: 11.0 cm
- Dimensions: L 18.0 x W 4.0 x H 1.4 cm
- Weight: 35 g
- Not all USB-C ports support all functions of USB Type-C™ standards. Make sure that the USB-C™ port of your laptop supports the DisplayPort Alternate Mode (DP Alt modes).
- The video output capability depends on the graphics card of your laptop and the connected monitor. Some screens also have a limited resolution.



GEN 1

USB 3.1
HDMI™

DA-70858 EAN 4016032451525 | USB Type-C™ - HDMI + VGA Adaptor

DIGITUS® Externes SSD-Gehäuse, M.2 - USB 3.1 Type-C™

- Unterstützt M.2 SATA SSDs
- SATA 3 - Datenübertragungsrates mit bis zu max. 6 Gbit/s
- USB 3.1 (Gen 2) SuperSpeed- Datenübertragungsrates mit bis zu max. 10 Gbit/s
- Stromversorgung über USB-Port, kein zusätzliches Netzteil erforderlich
- Edles und hochwertiges Aluminium-Gehäuse

Technical Features

- Supports M.2 module type: 2280 (80mm), 2260 (60mm), 2242 (42mm) and 2230 (30mm) with Key B on SATA base
- Supports hot-plugging and is plug & play capable

DIGITUS® External SSD Enclosure, M.2 - USB 3.1 Type-C™

- Supports M.2 SATA SSDs
- SATA 3 - data transfer rate of up to max. 6 Gbit/s
- USB 3.1 (Gen 2) SuperSpeed- data transfer rate of up to max. 10 Gbit/s
- Power supply via USB port, no additional power adaptor required
- Premium and high-quality aluminum housing

- Chipset: ASM1351
- LED activity indicator
- Supports UASP (USB Attached SCSI Protocol)



DA-71115 EAN 4016032433231 | External SSD Enclosure, M.2 - USB 3.1 Type-C™

DIGITUS® 2,5“ SSD/HDD-Gehäuse, SATA 3 - USB 3.1 Type-C™

- Schraubenloses Design - keine zusätzlichen Tools erforderlich
- Unterstützte Kapazität: bis zu 2 TB
- Unterstützt UASP (USB Attached SCSI Protocol)
- Edles und hochwertiges Aluminium-Gehäuse

Technical Features

- Supports SATA I-III SSDs/HDDs with a design height of 9.5 mm oder 7.0 mm
- SATA III - data transfer rate of up to max. 6 Gbit/s
- Power supply via USB port
- USB 3.1 (Gen 2) SuperSpeed- data transfer rate of up to max. 10 Gbit/s

DIGITUS® 2.5“ SSD/HDD Enclosure, SATA 3 - USB 3.1 Type-C™

- Screwless design - no additional tools required
- Supported capacity: up to 2 TB
- Supports UASP (USB Attached SCSI Protocol)
- Premium and high-quality aluminum housing

- Chipset: ASM1351
- LED activity indicator
- Supports hot-plugging and is plug & play capable



DA-71113 EAN 4016032423911 | 2.5" SSD/HDD Enclosure, SATA 3 - USB 3.1 Type-C™

DIGITUS® USB 3.1 Type-C™ - SATA 3 3 Adapterkabel für 2,5“ SSDs/HDDs

- Schneller und einfacher Zugriff auf Ihre 2,5“ SATA III SSDs/HDDs über den USB 3.1 Type-C™ Anschluss Ihres PCs/Notebooks
- USB 3.1 (Gen 1) - Datenübertragungsrates mit bis zu max. 5 Gbit/s
- Unterstützt UASP (USB Attached SCSI Protocol)
- Unterstützt Hot-Plugging und ist Plug&Play -fähig

Technical Features

- Connector 1: USB 3.1 Type-C™
- Connector 2: SATA (22 pin)
- Supports 2.5" SATA I-III SSDs/HDDs
- SATA III - data transfer rate of up to max. 6 Gbit/s
- Support capacity: up to 2 TB

DIGITUS® USB 3.1 Type-C™ - SATA 3 Adaptor Cable for 2.5“ SSDs/HDDs

- Faster and easier access to your 2.5" SATA III SSDs/HDDs via the USB 3.1 Type-C™ port on your PCs/notebooks
- USB 3.1 (Gen 1) - data transfer rate of up to max. 5 Gbit/s
- Supports UASP (USB Attached SCSI Protocol)
- Supports hot-plugging and is plug & play capable

- Supports hot-plugging and is plug & play capable
- Power supply via USB port
- Chipset: ASM1351
- LED activity indicator
- Cable length: 35 cm



DA-70327 EAN 4016032390565 | USB 3.1 Type-C™ - SATA 3 adaptor cable for 2.5" SSDs/HDDs

**DIGITUS® USB Type-C™
4-Port Hub (USB 3.0) + PD**



- Erweitern Sie Ihr Notebook um vier USB 3.0 Ports
- Laden Sie Ihren angeschlossenen Laptop über den USB-C™ Port am Hub
- Kompatibel mit vielen Betriebssystemen z.B. Mac OS, Windows und Google Chrome OS

**DIGITUS® USB Type-C™
4-Port Hub (USB 3.0) + PD**

- Extend your notebook by four USB 3.0 ports
- Charge your connected notebook via the USB-C™ port on the hub
- Compatible with many operating systems, e.g. Mac OS, Windows and Google Chrome OS

Technical Features

- 4x USB 3.0 ports with charging function (BC 1.2) when a power supply is plugged into the USB-C™ PD port
- 1x USB Type-C™ port with Power Delivery

- Power Delivery (PD) 3.0 up to 100 W max.
- Battery Charging (BC) 1.2
- Data transfer rates up to 5 Gbps
- Cable length: 20 cm

GEN 1

USB 3.1



PD 3.0

DA-70242-1 EAN 4016032386018 | USB Type-C™ 4-Port Hub (USB 3.0)

**DIGITUS® USB Type-C™
OTG 3-Port Hub + Kartenleser**



- OTG USB 2.0 Hub & Kartenleser
- USB 2.0 3-Port Hub
- SD/Micro SD Kartenlesegerät
- Elegantes Aluminiumgehäuse
- Unterstützt Datenübertragungen in High-Speed (480 Mbps) und Full-Speed (12 Mbps)
- Kompatibel mit Mac OS, Windows 10, Google Chrome OS und Android

**DIGITUS® USB Type-C™
OTG 3-Port HUB + Card Reader**

- OTG USB 2.0 Hub & Card Reader
- USB 2.0 3-Port Hub
- SD/Micro SD Cardreader
- Elegant aluminum housing
- Supports data transfer rates in high-speed (480 Mbps) and full-speed (12 Mbps)
- Compatible with Mac OS, Windows 10, Google Chrome OS and Android

Technical Features

- OTG USB 2.0 Hub & Card Reader
- USB 2.0 3-Port Hub
- USB 2.0 / 480Mbps Highspeed
- SD/Micro SD Cardreader

- Compatible with Mac OS, Windows 10, and Google Chrome OS
- Cable length: 15 cm

USB 2.0

DA-70243 EAN 4016032425830 | USB Type-C™ OTG 3-Port HUB + Card Reader

**DIGITUS® USB Type-C™ 3-Port Hub
+ Fast Ethernet LAN-Adapter**



- Universeller USB 2.0 Multiadapter mit Typ C Port
- Drei USB 2.0 Anschlüsse
- RJ45 Fast Ethernet Netzwerk Anschluss (10/100 Mbps)
- Hochwertiges Aluminiumgehäuse
- Für alle Betriebssysteme; Windows, Mac und Google Chrome

**DIGITUS® USB Type-C™ 3-Port Hub
+ Fast Ethernet LAN Adaptor**

- Universal USB multi-adaptor with Type C connector
- Three USB 2.0 ports
- RJ45 Fast Ethernet network connector (10/100 Mbps)
- High-quality aluminium housing
- For all operating systems: Windows, Mac, and Google Chrome

Technical Features

- Universal USB multi-adaptor with Type - C connector
- Three USB 2.0 ports
- RJ45 Fast Ethernet connector (10/100 Mbps)

- Chipset: FE1.1S/RTL8152B
- Cable length: 20 cm

USB 2.0



ETHERNET

DA-70253 EAN 4016032385998 | USB Type-C™ 3-Port Hub + Fast Ethernet LAN Adaptor

DIGITUS® USB Type-C™ 3-Port Hub (USB 3.0)

- **3-Port USB 3.0 HUB mit Type-C™ Ladeport**
- **Unterstützt Datenübertragungen mit bis zu 5 Gbps**
- **Abwärtskompatibel mit USB 2.0 und 1.1**
- **Kompatibel mit Mac OS, Windows 10 und Google Chrome OS**

Technical Features

- 1x USB Type-C™ port - Power Delivery (PD)3.0
- Compatible with Mac OS, Windows 10, and Google Chrome OS
- Cable length: 10 cm
- Size: 108x47x12mm
- Weight: 40g

DIGITUS® USB Type-C™ 3-Port Hub (USB 3.0)

- **3-port USB 3.0 hub with Type-C™ PD function**
- **Supports data transfer rates up to 5 Gbps**
- **Downward compatible with USB 2.0 and 1.1**
- **Compatible with Mac OS, Windows 10, and Google Chrome OS**



GEN 1
USB 3.1

DA-70244 EAN 4016032447443 | USB Type-C™ 3-Port Hub (USB 3.0)

DIGITUS® USB-C™ 4-Port Travel Hub, 10G

- **2x USB-C™ Ports - 1x 10G Datenübertragung, 1x 10G Datenübertragung + PD 3.0 (100W max.)**
- **2x USB-A Ports - 1x 10G Datenübertragung, 1x 10G Datenübertragung + BC 1.2 (1.5A)**
- **USB PD 3.0 Fast Role Swap (FRS)**

Technical Features

- Speeds of up to 10G on every hub port
- 1 x USB-C™ for data transfer + Power Delivery (PD) up to 100 W max.
- 1 x USB-C™ for data transfer
- 1 x USB 3.0 data transfer + additional charging function BC 1.2 for charging mobile devices such as smartphones and tablets
- 1 x USB 3.0 data transfer

DIGITUS® USB-C™ 4-Port Travel Hub, 10G

- **2x USB-C™ ports - 1x 10G data transfer, 1x 10G data transfer + PD 3.0 (100W max.)**
- **2x USB-A ports - 1x 10G data transfer, 1x 10G data transfer + BC 1.2 (1.5A)**
- **USB PD 3.0 fast role swap (FRS)**



GEN 2
USB 3.1 **USB 3.0**

DA-70256 EAN 4016032456452 | USB-C™ 4-Port Travel Hub, 10G

DIGITUS® USB Type-C™ 3-Port Hub + Gigabit Ethernet

- **Schnelle Datenübertragung dank USB 3.0 und Gigabit LAN**
- **Schnell austauschbar, Plug & Play**
- **Gigabit Datenübertragung mit bis zu 1000 Mbps**
- **Kompatibel mit Mac OS, Windows 10 und Google Chrome OS**

Technical Features

- Downward compatible to USB 2.0 and 1.1
- IEEE 802.3, IEEE 802.3u, IEEE 802.3ab compatible
- Supports both full-duplex with flow control and half-duplex with backpressure operation
- Supports twisted pair crossover detection and auto-correction (HP Auto-MDIX)

DIGITUS® USB Type-C™ 3-Port Hub + Gigabit Ethernet

- **Fast data transmission due to USB 3.0 and gigabit LAN**
- **Hot swappable, plug & play**
- **Gigabit data transfer rates of up to 1000 Mbps**
- **Compatible with Mac OS, Windows 10, and Google Chrome OS**



USB 3.0



DA-70255 EAN 4016032430100 | USB Type-C™ 3-Port Hub + Gigabit Ethernet



DIGITUS® 4-Port Universal USB-Ladeadapter, USB Type-C™

- 1x USB-C Ladeport (DC 5-20V, 3A, 60W max.)
- 3x USB-A Ladeport (jeder Port: DC 5V, 2,4A max.) zum Aufladen von Tablet, Smartphone, etc.
- Gesamtleistung: 72W max
- Power Delivery (PD) 2.0

Technical Features

- 1x USB-C charging port (max. DC 5-20V, 3A, 60W) for charging a laptop, tablet, smartphone, etc.
- 3x USB-A charging ports (total: max. DC 5V, 2.4A, each port: DC 5V, 2.4A max.) for charging a tablet, smartphone, speaker, power bank, etc.
- Total output power: 72W max.
- Power Delivery (PD) 2.0
- Input: AC 100-240V, 50/60 Hz

DIGITUS® 4-Port Universal USB Charging Adaptor, USB Type-C™

- 1x USB-C charging port (max. DC 5-20V, 3A, 60W)
- 3x USB-A charging ports (each port: max. DC 5V, 2.4A) for charging a tablet, smartphone, etc.
- Total output power: 72W max.
- Power Delivery (PD) 2.0

- Overvoltage and short circuit protection
- EU mains plug
- Cable length: 1.20 m
- Ultra compact - perfect for traveling, at home or on the go
- Dimensions: L 9.0 x W 7.5 x H 2.75 cm
- Weight: 220 g
- Color: black



PD 2.0

DA-10195 EAN 4016032448105 | 4-Port Universal USB Charging Adaptor, USB Type-C™

DIGITUS® Universal Travel USB-Ladestation

- Global nutzbare Ladestation für all Ihre Geräte
- 1x USB-C Ladeport (PD 2.0)
- 2x Qualcomm® Quick Charge™ 3.0 USB-Ladeports
- 3x Netzanschluss-Kabel (EU, US, UK) zum globalen Einsatz
- Leistung total: 40W (max.)
- Ladestrom für Notebooks: 40W (max.)

Technical Features

- Qualcomm® Quick Charge™ 3.0 - Charges compatible smartphones and tablets to up to 80% in just 30-35 minutes

DIGITUS® Universal Travel USB Charging Station

- Global charging station for all your devices
- 1x USB-C charging port (PD 2.0)
- 2x Qualcomm® Quick Charge™ 3.0 USB
- 3x power cords (EU, US, UK) for use anywhere in the world
- Total power: 40 W (max.)
- Charging current for notebooks: 40 W (max.)

- Backward-compatible with Quick Charge™ 2.0 + 1.0
- Protects against surges and short circuits
- Protects against overcurrent and overheating



PD 2.0

DA-10194 EAN 4016032430070 | Universal Travel USB Charging Station

**DIGITUS® USB Type-C™
Power Monitor**

- Messen Sie den Strom (A), der an Ihrem USB-C Anschluss eingegeben wird
- Messen Sie die Spannung (V) der Stromquelle, die an Ihrem USB-C Geräte angeschlossen ist
- Messen Sie die Leistungsaufnahme Ihres USB-C Gerätes über die Zeit (mAh)
- Unterstützt Datenübertragung Zeigt die Fließrichtung des Stroms an
- Laden Sie Ihr USB-C Gerät auf, während Sie die Stromversorgung überwachen

Technical Features

- Test the operating voltage and current of USB-C output devices
- Maximum measurable voltage (20V) and current (5A)

**DIGITUS® USB Type-C™
Power Monitor**

- Measure the input current (A) of your USB-C connector
- Measure the voltage (V) of the power source connected to your USB-C device
- Measure the power consumption of your USB-C device over time (mAh)
- Supports data transfer
- Displays the current flow direction
- Charge your USB-C device while monitoring the power supply



- Maximum meas Voltage range: 3V - 20V
- Charging current range: 30 mA - 5000 mA
- Accuracy: +/- 5%
- Electricity consumption: 5V/30mA

DA-70612 EAN 4016032434818 | USB Type-C™ Power Monitor

**DIGITUS® USB Type-C™
Serieller Adapter**

- Ermöglicht den Datenaustausch zwischen PC und seriellen Geräten (Maschinensteuerungen, Modems, Sensoren, etc.)
- Entspricht dem USB 2.0 Standard

Technical Features

- Supports RS232 serial interface
- Compliant with USB 2.0 standards
- Data transfer rates 1 Mbps and more
- Support remote wake-up and power management

**DIGITUS® USB Type-C™
Serial Adaptor**

- Enables the transfer of data between a PC and serial devices (machine controls, modems, sensors, and so on)
- Conforms to the USB 2.0 standard



- Cable length: 1 m
- Chipset: FTDI / FT232RL
- Supports Windows 10, 8.1, 8, 7, Vista, XP, Mac OS X and Linux

USB 2.0

DA-70166 EAN 4016032435129 | USB Type-C™ Serial Adaptor

**DIGITUS® PCIe USB 3.1 Karte
Type-C™**

- USB 3.1 Super Speed bis zu 10 Gbits
- Ergänzt Ihren Computer um 2 USB Type-C™ Ports
- PCI Express Dual Link Schnittstelle

Technical Features

- USB 3.1 SuperSpeed up to 10 Gbps
- Downward compatibility with USB 3.0, 2.0, and 1.1
- Supports data transfer rates of 10 Gbps, 5 Gbps, 480 Mbps, 12 Mbps, and 1.5 Mbps
- 5 V/900 mA at each port
- SATA 15 connector for additional power supply from the mainboard

**DIGITUS® PCIe USB 3.1 Card
Type-C™**

- USB 3.1 SuperSpeed up to 10 Gbps
- Provides your computer with two additional USB Type-C™ ports
- PCI Express Dual Link interface

- For PCIe interfaces with dual link only
- Overvoltage protection
- Supports Remote Wakeup Function with keyboard or mouse
- Windows Vista/7/8/8.1/10



DS-30223 EAN 4016032381211 | PCIe USB 3.1 Card Type-C™



DIGITUS® USB Type-C™ Multi-Port 4 in 1 A/V Kabelkonverter

- Unterstützt Auflösungen bis zu Ultra HD (60Hz), 4096 x 2160p
- Eingang: USB Type-C™
- Ausgänge: HDMI® + DP + DVI + VGA

Technical Features

- 1x USB Type-C™ input (Ultra HD 4K@30 Hz)
- 1x DisplayPort output (Ultra HD 4K@60 Hz)
- 1x HDMI output (Ultra HD 4K@60 Hz)
- 1x DVI output (Full HD 1080p@60 Hz)
- 1x VGA output (Full HD 1080p@60 Hz)
- The DP and HDMI® outputs support audio transmission



DIGITUS® USB Type-C™ MultiPort 4 in 1 A/V cable converter

- Supports resolutions up to Ultra HD (60Hz), 4096 x 2160p
- Input: USB Type-C™
- Outputs: HDMI® + DP + DVI + VGA

- No additional power supply unit is required
- Dimensions: L 8.6 x W 5.2 x 1.7 cm
- Cable length: 0.2m
- Color: black Weight: 58 g



GEN 1

USB 3.1



HDMI™

DA-70848 EAN 4016032439899 | USB Type-C™ MultiPort 4in1 A/V Cable Converter

DIGITUS® USB Type-C™ 3in1 Triple Monitor Konverter (HDMI, DP, VGA)

- 3x Videoschnittstellen (HDMI, DP, VGA) zum Anschluss von bis zu drei Monitoren zeitgleich (Triple Display Support)
- Wiedergabe in UHD 4K auf HDMI & DisplayPort möglich, unterstützt DP Alt Mode

Technical Features

- Play the same or different content on the 3 ports
- Resolution HDMI: UHD 4K/30Hz max.
- Resolution DisplayPort: UHD 4K/60Hz max.
- Resolution VGA: Full HD 1920 x 1200/60Hz max.
- Supports Plug & Play
- Supports DP++
- (Single Stream Transport) and MST (Multi Stream Transport) - Mirror & Extend Monitor

DIGITUS® USB Type-C™ 3in1 Triple Monitor Converter (HDMI, DP, VGA)


- 3x video interfaces (HDMI, DP, VGA) for connecting up to three monitors simultaneously (Triple Display Support)
- Playback in UHD 4K on HDMI & DisplayPort possible, supports DP Alt Mode

- Triple Display Support under Mac OS - SST (Single Stream Transport) - Mirroring the Monitor
- The resolution at the output device depends on the number and type of connected devices and the operating system.
- Cable length: 11 cm
- Power supply: USB-C™ Port of the notebook
- Operating temperature: 0 °C to 45 °C



GEN 1

USB 3.1



HDMI™

DA-70859 EAN 4016032456476 | USB Type-C™ 3in1 Triple Monitor Converter (HDMI, DP, VGA)



FÜR WEITERE INFOS KONTAKTIEREN SIE BITTE UNSER SALES TEAM
FOR FURTHER INFORMATION PLEASE CONTACT OUR SALES TEAM

sales@assmann.com

VIELSEITIGES SORTIMENT

Unser Sortiment reicht von Standard Geräteanschluss-Kabeln für Drucker, Monitore, Telefone, Fernseher u.v.m., über FireWire-, Thunderbolt, MHL-, Audio- und Videokabel mit z.B. HDMI- oder DisplayPort-Anschluss bis hin zu Tablet- und Smartphone-Kabel für den mobilen Einsatz. Wir führen Kabel in unterschiedlichen Längen für die unterschiedlichsten Anwendungen. Mit **DIGITUS®** findet jeder sein passendes Kabel.

EINHEITLICHE VERPACKUNG

Mit dem neuen Verpackungskonzept lassen sich attraktive Verkaufsflächen gestalten. Die Verpackungen sind so konstruiert, dass sich stets ein sauberes, übersichtliches und ansprechendes Gesamtbild ergibt. Die Verkaufsflächen können so voll ausgenutzt werden.

STANDARDS

CE-Richtlinien
WEEE-Richtlinien
RoHS-Richtlinien
REACH-Verordnung

WARUM ALSO DIGITUS® KABEL?

- Schneller Datentransfer
- Stabile Signalübertragung
- Keine Störung des Bild- und Tonsignals
- Hervorragendes Preis-/Leistungsverhältnis
- Einheitliches und fokussiertes Topseller-Sortiment
- 10-sprachige Produktbeschreibungen auf der Verpackung
- Produkte höchster Qualität

VERSATILE RANGE

Our product line ranges from standard device-connection cables for printers, monitors, telephones, televisions, etc., via FireWire, Thunderbolt, MHL, audio, and video cables with, e.g., HDMI or DisplayPort connectors, to tablet and smartphone cables for mobile use. We carry cables in various lengths for different applications. At **DIGITUS®**, everyone will find the right cable.

UNIFORM PACKAGING

With the new packaging design, attractive sales areas can be designed. The packages are designed so that a clean, well-arranged and attractive overall display is the result. This allows for sales areas to be fully utilised.

STANDARDS

CE directive
WEEE regulations
RoHS directive
REACH regulations

WHY CHOOSE DIGITUS® CABLES?

- Fast data transfer
- Stable transmission of signals
- No interference in image and sound signals
- Outstanding price/performance
- Uniform and focused top seller assortment
- 10 different languages on the packaging
- Premium quality



PAPER BOX (BLISTER)

Die DIGITUS® Kabel werden in einer hochwertigen, platzoptimierten und übersichtlichen Paperbox-Verpackung geliefert und sind somit optimal zur Präsentation an Blisterwänden geeignet.

PAPER BOX (BLISTER)

DIGITUS® cables are supplied in high-quality, space-saving paper box, making them perfectly suited for presentation on a blister pack display.



BLISTERBAG

Die DIGITUS® Kabel werden in einem DIGITUS® Blisterbag, einer strapazierfähigen Schutzverpackung, geliefert.

BLISTERBAG

DIGITUS® cables are supplied in blister packs – durable, protective packaging.

Die Blisterbag-Verpackungen sind mit einem sicheren Klebeverschluss versehen und schützen so die Ware vor Staub und Verschmutzung. Des Weiteren sind die Blisterbags mit einem Etikett versehen, der den Produktnamen in 10 Sprachen und der Artikelnummer trägt.


Blister bags come with a secure, adhesive closure to protect the product from dust and dirt. Furthermore, blister bags are provided with a label bearing the product name in 10 languages as well as the item number.

Dank Euro-Lochung und hoher Reißfestigkeit sind die Blisterbags sehr gut für die Blisterwand geeignet.

Euro-perforation and high resistance to tearing make the blister packs well suited for a blister pack display.





 DIE GESAMTE PRODUKTÜBERSICHT FINDEN SIE IN UNSEREM HAUPTKATALOG.
PLEASE FIND THE FULL PRODUCTION RANGE IN OUR MAIN CATALOG.