


EXTEND


ADDERLink™ X-DVI PRO

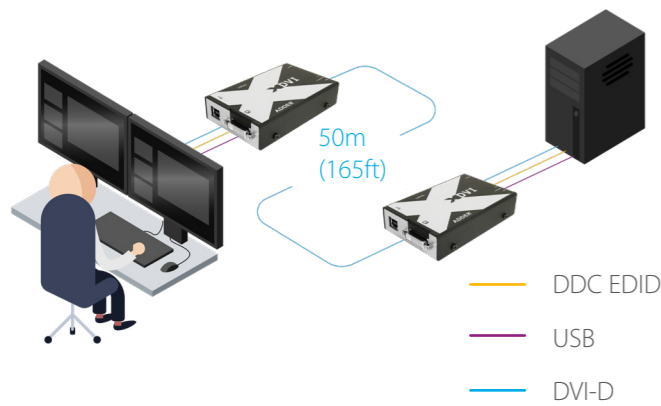

- ▶ **Extension Distance (max):** 50m
- ▶ **Video Resolution:** 1920 x 1200 @ 60Hz
- ▶ **Number of Screens:** 1 or 2
- ▶ **Connection Type:** DVI-D
- ▶ **Medium Type:** CATX Shielded
- ▶ **USB:** USB2.0 (12Mbps)
- ▶ **Audio (Analogue):** Uni-directional

EXTEND


ADDERLink XD150

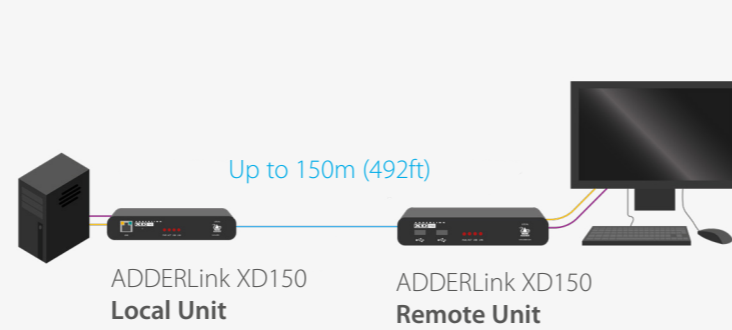

- ▶ **Extension Distance (max):** 150m
- ▶ **Video Resolution:** 1920 x 1200 @ 60Hz
- ▶ **Number of screens:** 1
- ▶ **Connection Type:** DVI-D
- ▶ **Medium Type:** CATX or Fibre (FX)
- ▶ **USB:** USB2.0 (480Mbps)
- ▶ **Audio (Analogue):** Uni/Bi-directional (FX)

EXTEND

ADDERLink XD522

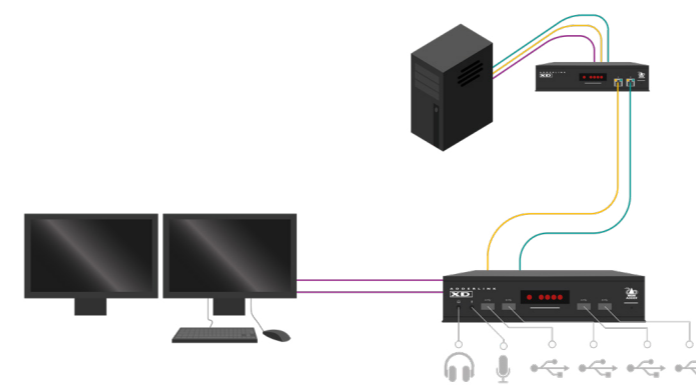

- ▶ **Extension Distance (max):** 150m
- ▶ **Video Resolution:** 3840 x 2160 @ 30Hz
- ▶ **Number of screens:** 2
- ▶ **Connection Type:** DisplayPort™
- ▶ **Medium Type:** CATX
- ▶ **USB:** USB2.0 (480Mbps)
- ▶ **Audio (Analogue):** Bi-directional & SPDIF




PRODUCT FOCUS

High Performance IP KVM

EXTEND • SWITCH  
REMOTE • MATRIX

SWITCH


ADDER CCS-PRO

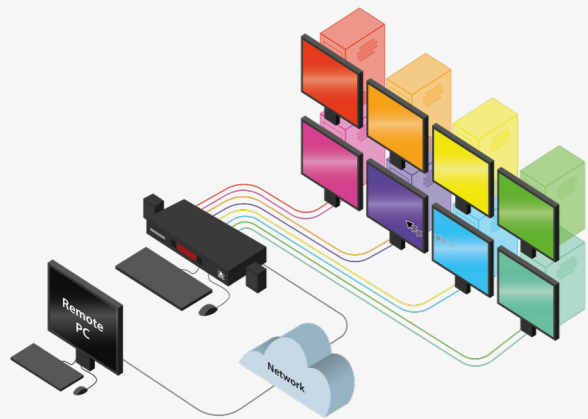

- ▶ **Switch Between up to 8 Computers**
- ▶ **FreeFlow Technology:** Seamless switching by mouse control
- ▶ **Simultaneous Device Selection:** Gives full control of USB peripherals
- ▶ **CCS-XB Illumination:** Enables screen identification
- ▶ **Redundant Power:** Suitable for mission-critical applications

REMOTE


ADDERView™ CATx

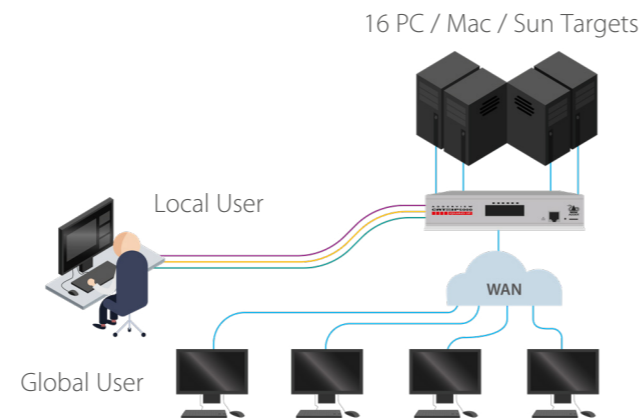

- ▶ **Video Resolution:** 1920 x 1200 with Display Data Channel emulation
- ▶ **Plug and Play:** Flexible set up
- ▶ **Local and Remote Access:** Up to 24 multi-platform servers via CATx cabling
- ▶ **User Profiles:** Create 16-24 profiles with defined access rights
- ▶ **Flexible Expansion:** Link units with CATx cable

REMOTE

ADDERLink ipeps+

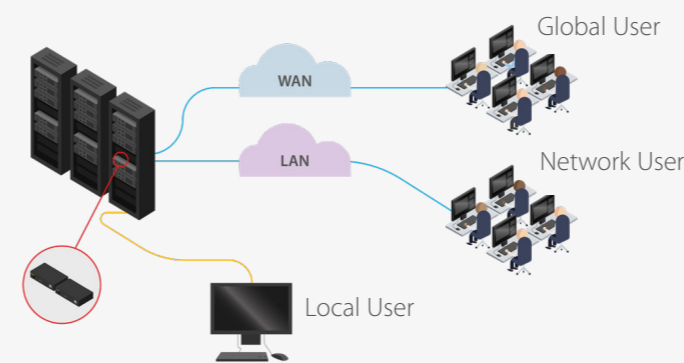

- ▶ **Video Resolution:** 1920 x 1200 @ 30Hz
- ▶ **Secure Remote Access:** Via the internet or corporate network
- ▶ **Client Software:** RealVNC™
- ▶ **Full Control:** During boot up, BIOS level or crash states
- ▶ **User Profiles:** Create up to 16 profiles with defined access rights



**ADDER TECHNOLOGY**  
Global Headquarters  
Tel: +44 (0)333 207 9766  
Email: sales@adder.com

EUROPE

**ADDER BERLIN**  
Tel: +49 (0)30 8849 67-50  
Email: sales@adder.com

**ADDER AMSTERDAM**  
Tel: +31(0)321 383 501  
Email: sales@adder.com

**ADDER STOCKHOLM**  
Tel: +46 (8) 574 210 95  
Email: sales@adder.com

**ADDER BARCELONA**  
Tel: +34 937 021 967  
Email: sales@adder.com

AMERICAS

**ADDER CORPORATION**  
Tel: +1 888-932-3337  
Email: usasales@adder.com

**ADDER SAN FRANCISCO**  
Tel: +1 888-932-3337 x1006  
Email: usasales@adder.com

**ADDER PHOENIX**  
Tel: +1 888-932-3337 x1014  
Email: usasales@adder.com

**ADDER LATAM**  
Tel: +34 937021967  
Email: sales@adder.com


APAC

**ADDER SINGAPORE**  
Tel: +65 6288 5767  
Email: asiasales@adder.com

**ADDER SHANGHAI**  
Tel: +86 (0)64 270677  
Email: asiasales@adder.com

## ADDERView™ DDX


A flexible KVM switch that provides lossless KVM extension technology with flexi-port switching ability - giving multiple users access to multiple computers.

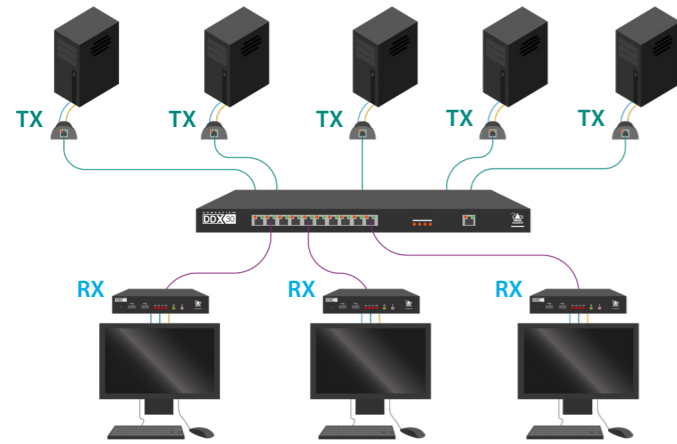

- ▶ **Extension Distance (max):** 50m
- ▶ **Video Resolution:** 1920 x 1200 @ 60Hz
- ▶ **Number of Screens:** 1
- ▶ **Connection Type:** DVI-D, VGA, DisplayPort™
- ▶ **Medium Type:** CATX Shielded
- ▶ **USB:** USB2.0 (HID)
- ▶ **Audio (Analogue):** Uni-directional

## ADDERLink™ INFINITY Range

A high performance IP KVM matrix solution that allows access to multiple computers located in separate rooms, buildings or cities; making it well suited to the needs of medium to large scale enterprises.

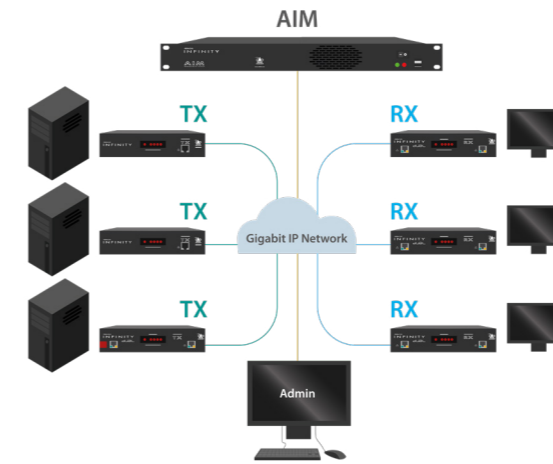

## ADDERLink INFINITY 100T


ZeroU IP KVM



- ▶ **Extension Distance:** 100M (IP)
- ▶ **Video Resolution:** 2560 x 1200 @ 60Hz
- ▶ **Number of Screens:** 1
- ▶ **Connection Type :** DP, DVI-D, VGA
- ▶ **Medium Type:** CATX
- ▶ **USB:** USB2.0 (12Mbps)
- ▶ **Audio (Analogue):** USB Bi-directional

## ADDERLink™ XDIP

A scalable and easy-to-install IP KVM matrix solution that simplifies the creation of an extension, switching or multi-casting network.

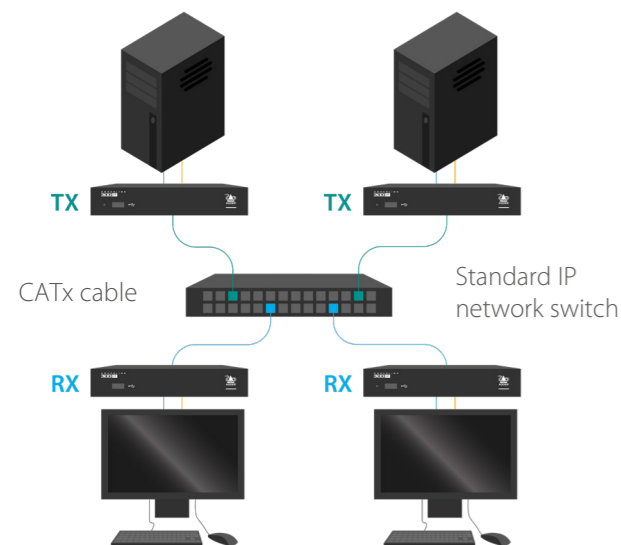

- ▶ **Extension Distance (max):** 100M (IP)
- ▶ **Video Resolution:** 1920 x 1200 @ 60Hz
- ▶ **Number of Screens:** 1
- ▶ **Connection Type:** HDMI
- ▶ **Medium Type:** CATX
- ▶ **USB:** USB2.0 (HID)
- ▶ **Audio (Analogue):** Uni / Bi-directional (FX)

## ADDERLink INFINITY 3000

VM IP ACCESS KVM



- ▶ **Extension Distance:** 100m (IP)
- ▶ **Video Resolution:** 2560 x 1600 @ 60Hz
- ▶ **Number of Screens:** 2
- ▶ **Connection Type :** DisplayPort™
- ▶ **Medium Type:** CATX or Fiber
- ▶ **USB:** USB2.0
- ▶ **Audio (Analogue):** Bi-directional

## ADDERLink INFINITY 4000 Series

4K IP KVM



- ▶ **Extension Distance:** 100M (IP)
- ▶ **Video Resolution:** 4096 x 2160 @ 60Hz
- ▶ **Number of Screens:** 2
- ▶ **Connection Type :** DisplayPort™
- ▶ **Medium Type:** Fibre
- ▶ **USB:** USB2.0 (480Mbps)
- ▶ **Audio (Analogue):** Bi-directional